

Model: 61801

Basic size of
mm

| | |
|----|----|
| d: | 12 |
| D: | 21 |
| B: | 5 |


The basic rated load is
kN

| | |
|---------------------------|-------|
| trends C: | 1.43 |
| static state Co: | 0.67 |
| Fatigue load limit Pu: | 0.028 |

Rated rotation speed is
r/min

| | |
|---------------------|--------|
| Refer to the speed: | 70000 |
| limit speed: | 43000 |
| Mass kg: | 0.0063 |
| model: | 61801 |

Dimensions are
mm

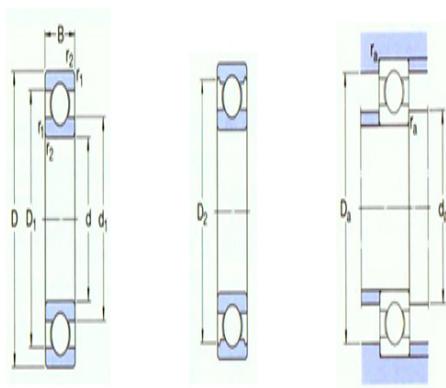

| | |
|---------------------------|------|
| d: | 12 |
| d1 ~ : | 15 |
| D1 ~ : | 18.2 |
| D2 ~ : | - |
| r _{1,2} the min: | 0.3 |

Shoulder gear and chamfer size
mm

| | |
|-------------------------|-----|
| d _a the min: | 14 |
| D _a the max: | 19 |
| r _a the max: | 0.3 |

Calculation coefficient

| | |
|------------------|-------|
| k _r : | 0.015 |
| f _o : | 9.7 |