

Model: 6224

Basic size of

mm

| | |
|----|-----|
| d: | 120 |
| D: | 215 |
| B: | 40 |

The basic rated load is


kN

| | |
|------------------------|-----|
| trends C: | 146 |
| static state Co: | 118 |
| Fatigue load limit Pu: | 3.9 |

Rated rotation speed is

r/min

| | |
|---------------------|------|
| Refer to the speed: | 6300 |
| limit speed: | 4000 |
| Mass kg: | 5.15 |
| model: | 6224 |

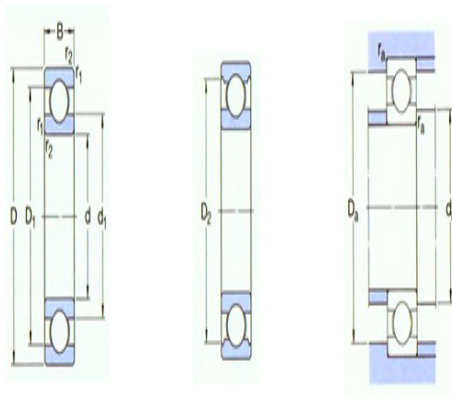

Dimensions are

mm

| | |
|---------------------------|-----|
| d: | 120 |
| d1 ~ : | 151 |
| D1 ~ : | 184 |
| D2 ~ : | 189 |
| r _{1,2} the min: | 2.1 |

Shoulder gear and chamfer size

mm

| | |
|-------------------------|-----|
| d _a the min: | 132 |
| Da the max: | 203 |
| r _a the max: | 2 |

Calculation coefficient

| | |
|------------------|-------|
| k _r : | 0.025 |
| f _o : | 14 |