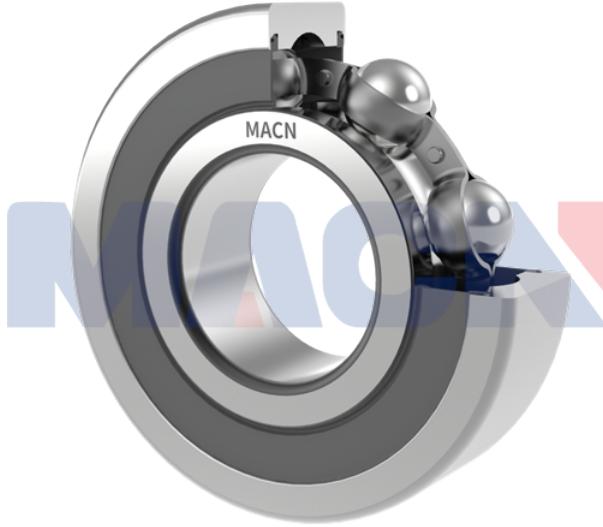


## Model: 604-2Z



Basic size of

mm

d: 4

D: 12

B: 4

The basic rated load is

kN

trends C: 0.81

static state Co: 0.28

Fatigue load limit  
Pu: 0.012

Rated rotation speed is

r/min

Refer to the speed: 120000

Limit speed <sup>1)</sup>: 60000Mass  
kg: 0.0021

model

Both sides are sealed: 604-2Z

One side is sealed: 604-Z

Dimensions are

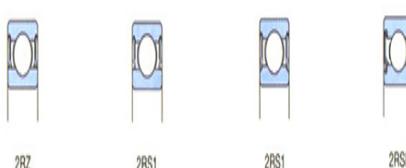
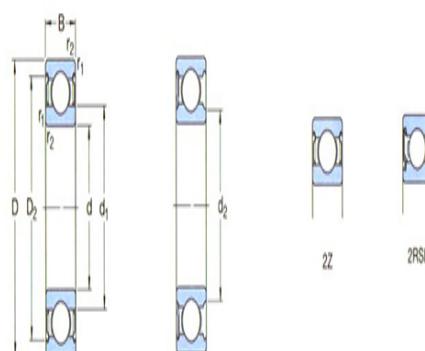
mm

d: 4

d1 ~ : 6.1

d2 ~ : -

D2 ~ : 9.8

r<sub>1,2</sub> the min: 0.2

Shoulder gear and chamfer size

mm

d<sub>a</sub> the min: 5.4d<sub>a</sub> the max: -

Da the max: 10.6

r<sub>a</sub> the max: 0.2

Calculation coefficient

k<sub>r</sub>: 0.025

