

## Model: 628/6-2Z



Basic size of

mm

d: 6

D: 13

B: 5

The basic rated load is

kN

trends C: 0.88

static state Co: 0.35

Fatigue load limit  
Pu: 0.015

Rated rotation speed is

r/min

Refer to the speed: 110000

Limit speed <sup>1)</sup>: 53000Mass  
kg: 0.0026

model

Both sides are sealed: 628/6-2Z

One side is sealed: -

Dimensions are

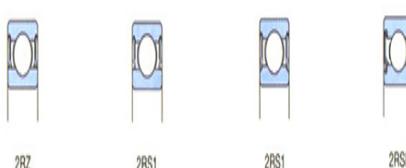
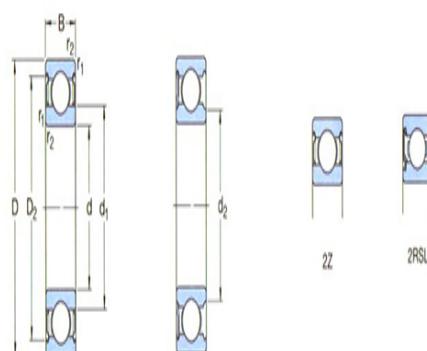
mm

d: 6

d1 ~ : 7.9

d2 ~ : -

D2 ~ : 11.7

r<sub>1,2</sub> the min: 0.15

Shoulder gear and chamfer size

mm

d<sub>a</sub> the min: 6.8d<sub>a</sub> the max: -

Da the max: 12.2

r<sub>a</sub> the max: 0.1

Calculation coefficient

k<sub>r</sub>: 0.015

