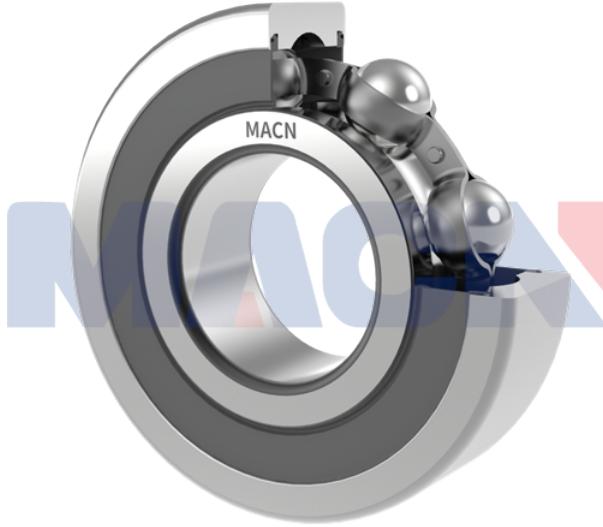


## Model: 607-2Z



Basic size of

mm

d: 7

D: 19

B: 6

The basic rated load is

kN

trends C: 2.34

static state Co: 0.95

Fatigue load limit

0.04

Pu:

Rated rotation speed is

r/min

Refer to the speed: 85000

Limit speed <sup>1)</sup>: 43000Mass  
kg: 0.0075

model

Both sides are sealed: \*607-2Z

One side is sealed: \*607-Z

Dimensions are

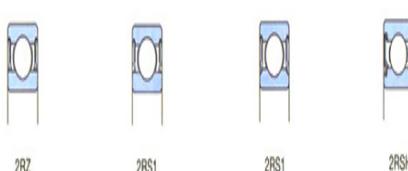
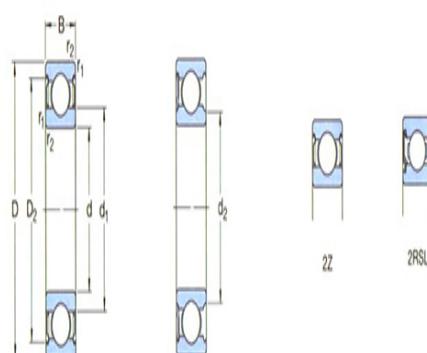
mm

d: 7

d1 ~ : 11.1

d2 ~ : -

D2 ~ : 16.5

r<sub>1,2</sub> the min: 0.3

Shoulder gear and chamfer size

mm

d<sub>a</sub> the min: 9d<sub>a</sub> the max: -

Da the max: 17

r<sub>a</sub> the max: 0.3

Calculation coefficient

k<sub>r</sub>: 0.025

