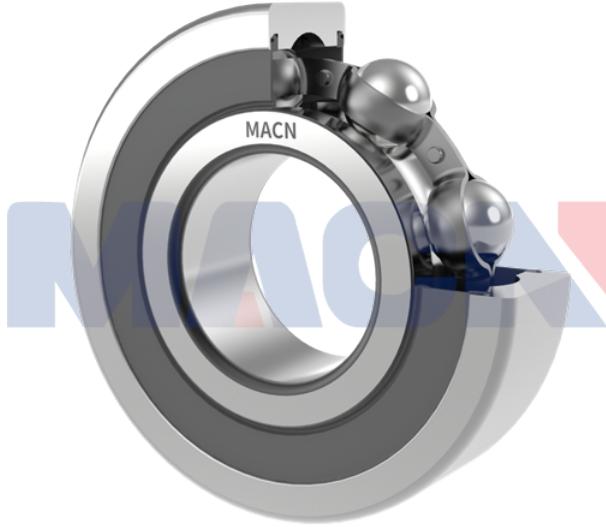


Model: 608-2RSH



Basic size of

mm

d: 8

D: 22

B: 7

The basic rated load is

kN

trends C: 3.45

static state Co: 1.37

Fatigue load limit 0.057

Pu:

Rated rotation speed is

r/min

Refer to the speed: -

Limit speed ¹⁾: 22000Mass 0.012
kg:

model

Both sides are sealed: *608-
2RSH

One side is sealed: *608-RSH

Dimensions are

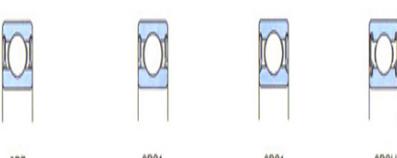
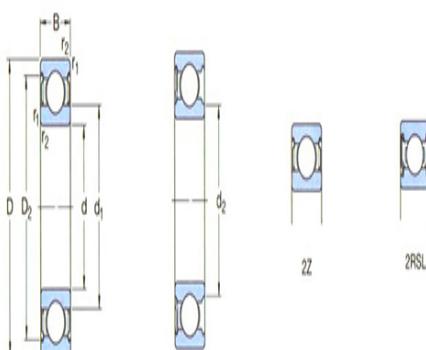
mm

d: 8

d1 ~ : -

d2 ~ : 10.6

D2 ~ : 19.2

r_{1,2} the min: 0.3

2RZ 2RS1 2S1 2RSH

Shoulder gear and chamfer size

mm

d_a the min: 10d_a the max: 10.5

Da the max: 20

r_a the max: 0.3

Calculation coefficient

k_r :

0.025

f_0 :

12

