


## Model: 6000-2Z

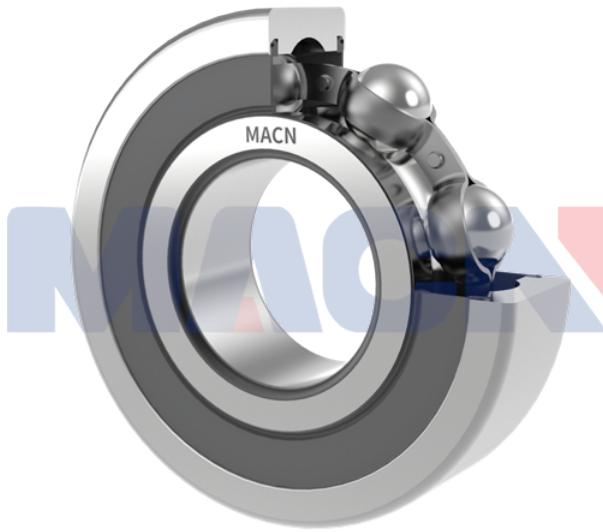

Basic size of

mm

d: 10

D: 26

B: 8

The basic rated load is

kN

trends C: 4.75

static state Co: 1.96

Fatigue load limit  
Pu: 0.083

Rated rotation speed is

r/min

Refer to the speed: 67000

Limit speed <sup>1)</sup>: 34000Mass  
kg: 0.019

model

Both sides are sealed: \*6000-2Z

One side is sealed: \*6000-Z

Dimensions are


mm

d: 10

d1 ~ : 14.8

d2 ~ : -

D2 ~ : 22.6

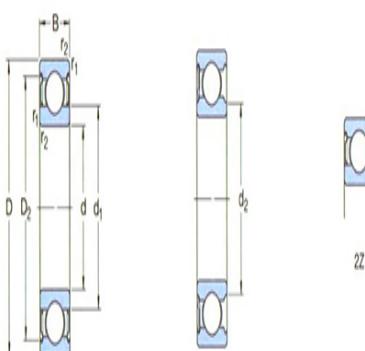r<sub>1,2</sub> the min: 0.3

2RSL



2RSI



2RSI

Shoulder gear and chamfer size  
mmd<sub>a</sub> the min: 12d<sub>a</sub> the max: -

Da the max: 24

r<sub>a</sub> the max: 0.3

Calculation coefficient

k<sub>r</sub>: 0.025

