


Model: 6300-2RSL

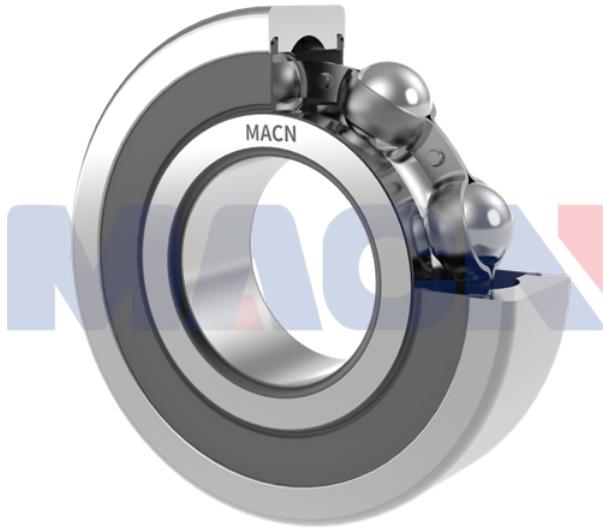

Basic size of

mm

d: 10

D: 35

B: 11

The basic rated load is

kN

trends C: 8.52

static state Co: 3.4

Fatigue load limit
Pu: 0.143

Rated rotation speed is

r/min

Refer to the speed: 50000

Limit speed ¹⁾: 26000Mass
kg: 0.053

model

Both sides are sealed: *6300-
2RSL

One side is sealed: *6300-RSL

Dimensions are


mm

d: 10

d1 ~ : -

d2 ~ : 15.7

D2 ~ : 28.7

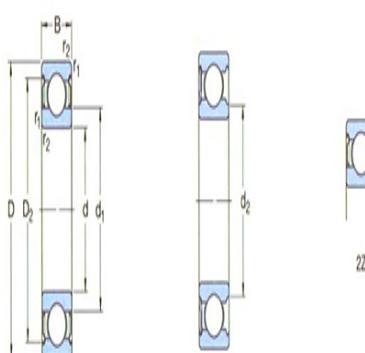r_{1,2} the min: 0.6

2RSL



2RS1



2RS1

Shoulder gear and chamfer size

mm

d_a the min: 14.2d_a the max: 15.5

Da the max: 30.8

r_a the max: 0.6

Calculation coefficient

k_r :

0.03

f_0 :

11

