

**Model: 6001-2RSL**

Basic size of

mm

d:	12
D:	28
B:	8

The basic rated load is

kN

trends C:	5.4
static state Co:	2.36
Fatigue load limit Pu:	0.1

Rated rotation speed is

r/min

Refer to the speed:	60000
Limit speed <sup>1)</sup> :	30000
Mass kg:	0.022

model

Both sides are sealed:	*6001-2RSL
One side is sealed:	*6001-RSL

Dimensions are

mm



d:	12
d1 ~ :	-
d2 ~ :	15.2
D2 ~ :	24.8
r <sub>1,2</sub> the min:	0.3

Shoulder gear and chamfer size

mm

d <sub>a</sub> the min:	14
d <sub>a</sub> the max:	15
Da the max:	26
r <sub>a</sub> the max:	0.3

Calculation coefficient

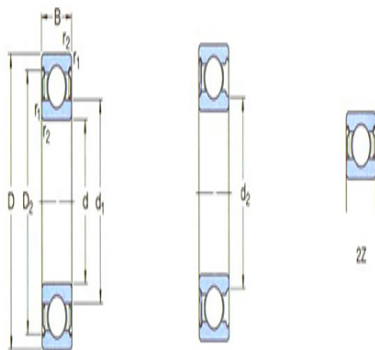

$k_f$ : 0.025

$f_o$ : 13



2RSH

