

**Model: 6201-2RSL**

Basic size of  
mm

d:	12
D:	32
B:	10

The basic rated load is  
kN

trends C:	7.28
static state Co:	3.1
Fatigue load limit Pu:	0.132

Rated rotation speed is  
r/min

Refer to the speed:	50000
Limit speed <sup>1)</sup> :	26000
Mass kg:	0.037

model

Both sides are sealed:	*6201-2RSL
One side is sealed:	*6201-RSL



Dimensions are  
mm

d:	12
d1 ~ :	-
d2 ~ :	16.6
D2 ~ :	27.4
r <sub>1,2</sub> the min:	0.6

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	16.2
d <sub>a</sub> the max:	16.5
Da the max:	27.8
r <sub>a</sub> the max:	0.6

Calculation coefficient

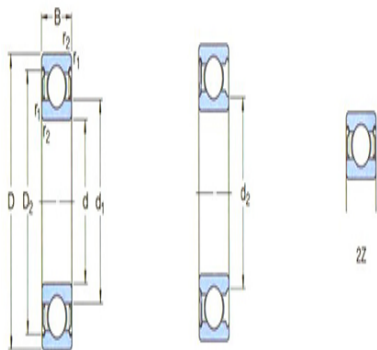

$k_f$ : 0.025

$f_o$ : 12



2RSH

