



**Model: 6202-RSL**

Basic size of  
mm

d:	15
D:	35
B:	11

The basic rated load is  
kN

trends C:	8.06
static state Co:	3.75
Fatigue load limit Pu:	0.16

Rated rotation speed is  
r/min

Refer to the speed:	43000
Limit speed <sup>1)</sup> :	22000
Mass kg:	0.045

model

Both sides are sealed:	*6202-2RSL
One side is sealed:	*6202-RSL



Dimensions are  
mm

d:	15
d1 ~ :	-
d2 ~ :	19.4
D2 ~ :	30.4
r <sub>1,2</sub> the min:	0.6

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	19.2
d <sub>a</sub> the max:	19.4
Da the max:	30.8
r <sub>a</sub> the max:	0.6

Calculation coefficient

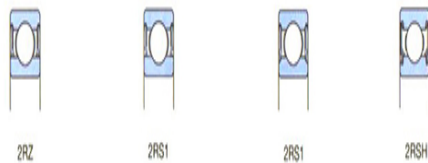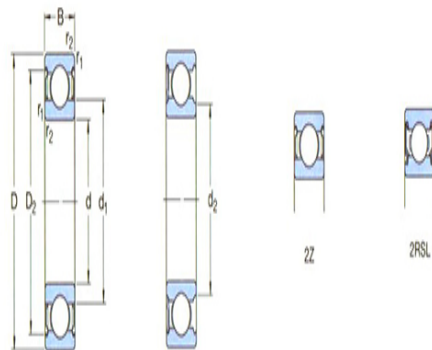

$k_f$ : 0.025

$f_o$ : 13

