**Model: 6204-2RSL**

Basic size of

mm

d: 20

D: 47

B: 14

The basic rated load is

kN

trends C: 13.5

static state Co: 6.55

Fatigue load limit

0.28

Pu:

Rated rotation speed is

r/min

Refer to the speed: 32000

Limit speed <sup>1)</sup>: 17000Mass  
kg: 0.11

model

Both sides are sealed: \*6204-  
2RSL

One side is sealed: \*6204-RSL

Dimensions are

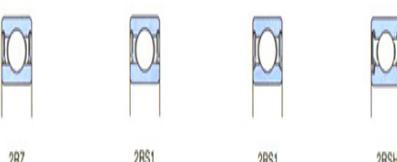
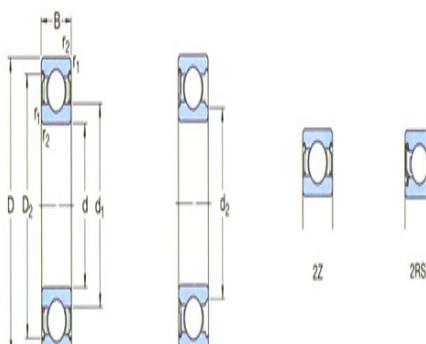
mm

d: 20

d1 ~ : -

d2 ~ : 26.3

D2 ~ : 40.6

r<sub>1,2</sub> the min: 1

2RZ

2RS1

2RS1

2RSH

Shoulder gear and chamfer size

mm

d<sub>a</sub> the min: 25.6d<sub>a</sub> the max: 26

Da the max: 41.4

r<sub>a</sub> the max: 1

Calculation coefficient

$k_r$ :

0.025

$f_0$ :

13

