



**Model: 6304-2RSL**

Basic size of

mm

d:	20
D:	52
B:	15

The basic rated load is

kN

trends C:	16.8
static state Co:	7.8
Fatigue load limit Pu:	0.335

Rated rotation speed is

r/min

Refer to the speed:	30000
Limit speed <sup>1)</sup> :	15000
Mass kg:	0.14

model

Both sides are sealed:	*6304-2RSL
One side is sealed:	*6304-RSL

Dimensions are

mm



d:	20
d1 ~ :	-
d2 ~ :	27.2
D2 ~ :	44.8
r <sub>1,2</sub> the min:	1.1

Shoulder gear and chamfer size

mm

d <sub>a</sub> the min:	27
d <sub>a</sub> the max:	27
Da the max:	45
r <sub>a</sub> the max:	1

Calculation coefficient

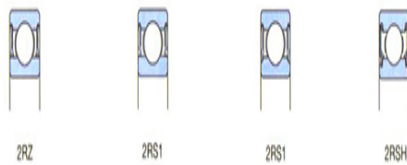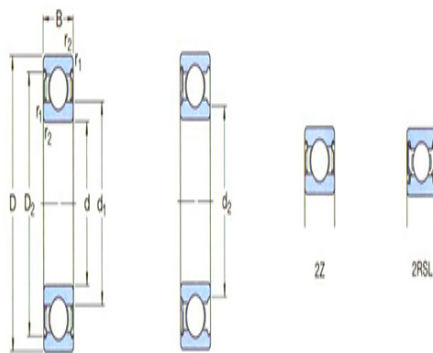

$k_f:$  0.03

$f_o:$  12

