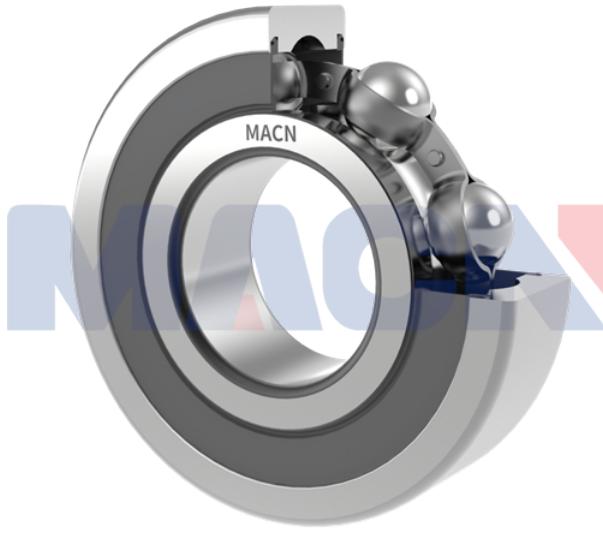


## Model: 62305-2RS1



Basic size of

mm

d: 25

D: 62

B: 24

The basic rated load is

kN

trends C: 22.5

static state Co: 11.6

Fatigue load limit 0.49

Pu:

Rated rotation speed is

r/min

Refer to the speed: -

Limit speed <sup>1)</sup>: 7500Mass 0.32  
kg:

model

Both sides are sealed: 62305-  
2RS1

One side is sealed: -

Dimensions are

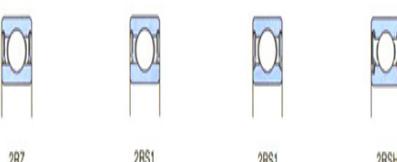
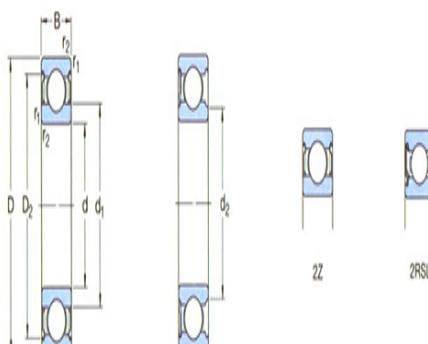
mm

d: 25

d1 ~ : 36.6

d2 ~ : -

D2 ~ : 52.7

r<sub>1,2</sub> the min: 1.1

2RZ

2RS1

2RS1

2RS1

Shoulder gear and chamfer size

mm

d<sub>a</sub> the min: 32d<sub>a</sub> the max: -

Da the max: 55

r<sub>a</sub> the max: 1

Calculation coefficient

$k_r$ :

0.03

$f_0$ :

12

