



Model: 6006-2RS1

Basic size of
mm

d:	30
D:	55
B:	13

The basic rated load is
kN

trends C:	13.8
static state Co:	8.3
Fatigue load limit Pu:	0.355

Rated rotation speed is
r/min

Refer to the speed:	-
Limit speed ¹⁾ :	8000
Mass kg:	0.12

model

Both sides are sealed:	*6006-2RS1
One side is sealed:	*6006-RS1



Dimensions are
mm

d:	30
d1 ~ :	38.2
d2 ~ :	-
D2 ~ :	49
r _{1,2} the min:	1

Shoulder gear and chamfer size
mm

d _a the min:	34.6
d _a the max:	-
Da the max:	50.4
r _a the max:	1

Calculation coefficient

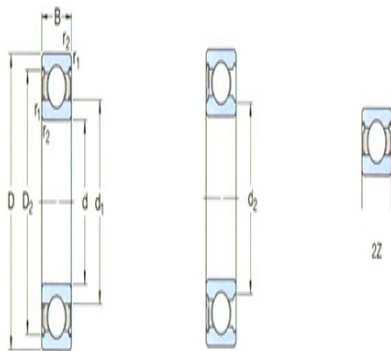

$k_f:$ 0.025

$f_o:$ 15

