


## Model: 6222-2Z

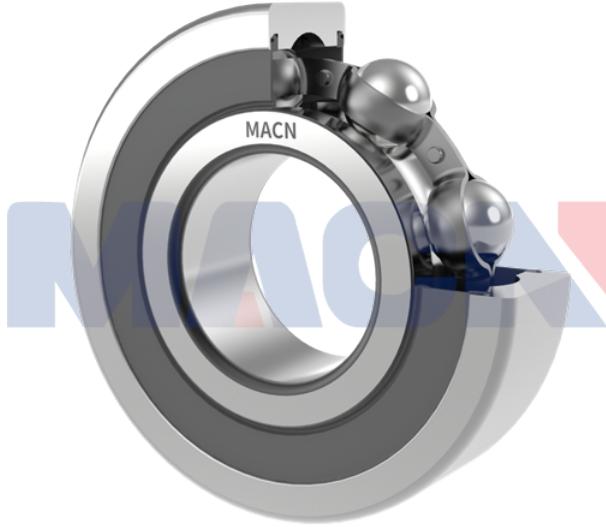

Basic size of

mm

d: 110

D: 200

B: 38

The basic rated load is

kN

trends C: 151

static state Co: 118

Fatigue load limit

4

Pu:

Rated rotation speed is

r/min

Refer to the speed: 6700

Limit speed <sup>1)</sup>: 3400

Mass kg: 4.35

model

Both sides are sealed: \*6222-2Z

One side is sealed: \*6222-Z

Dimensions are


mm

d: 110

d1 ~ : 138

d2 ~ : -

D2 ~ : 177

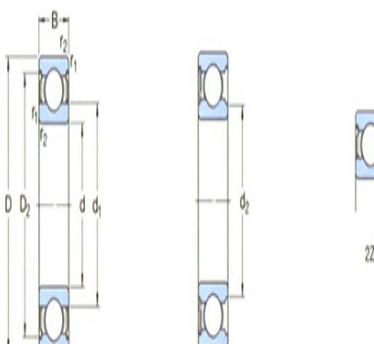r<sub>1,2</sub> the min: 2.1

2R2

2RS1

2RS1

Shoulder gear and chamfer size

mm

d<sub>a</sub> the min: 122d<sub>a</sub> the max: -

Da the max: 188

r<sub>a</sub> the max: 2

Calculation coefficient

k<sub>r</sub>: 0.025

