


## Model: 6322-ZTN9

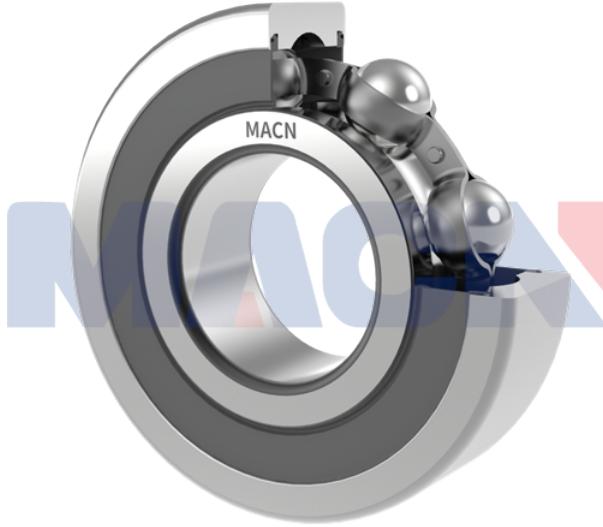

Basic size of

mm

d: 110

D: 240

B: 50

The basic rated load is

kN

trends C: 203

static state Co: 180

Fatigue load limit  
Pu: 5.7

Rated rotation speed is

r/min

Refer to the speed: 6000

Limit speed <sup>1)</sup>: 3000Mass  
kg: 9.55

model

Both sides are sealed: 6322-ZTN9

One side is sealed: 6322-ZTN9

Dimensions are


mm

d: 110

d1 ~ : 149

d2 ~ : -

D2 ~ : 205

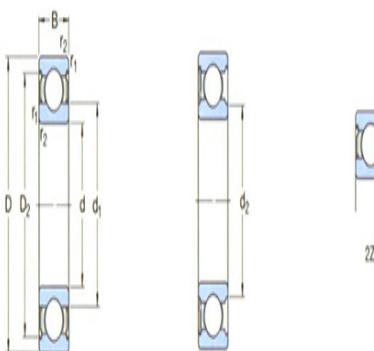r<sub>1,2</sub> the min: 3

2R2

2S1

2S1

Shoulder gear and chamfer size

mm

d<sub>a</sub> the min: 124d<sub>a</sub> the max: -

Da the max: 226

r<sub>a</sub> the max: 2.5

Calculation coefficient

$k_r$ :	0.03
$f_0$ :	13

