


## Model: 6026-Z

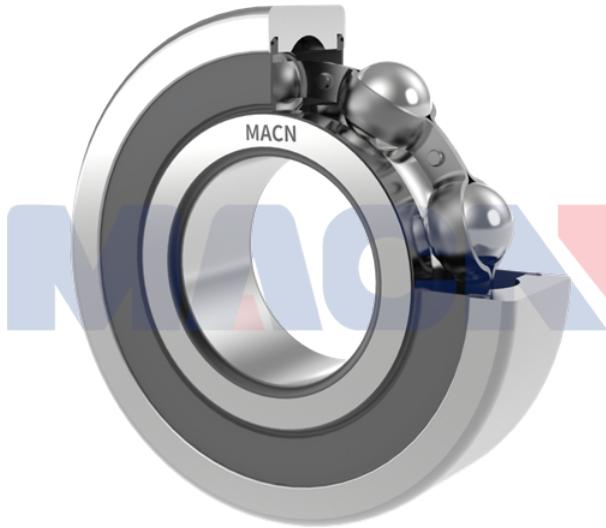

Basic size of

mm

d: 130

D: 200

B: 33

The basic rated load is

kN

trends C: 112

static state Co: 100

Fatigue load limit  
Pu: 3.35

Rated rotation speed is

r/min

Refer to the speed: 7000

Limit speed <sup>1)</sup>: 3400Mass  
kg: 3.15

model

Both sides are sealed: \*6026-2Z

One side is sealed: \*6026-Z

Dimensions are


mm

d: 130

d1 ~ : 153

d2 ~ : -

D2 ~ : 182

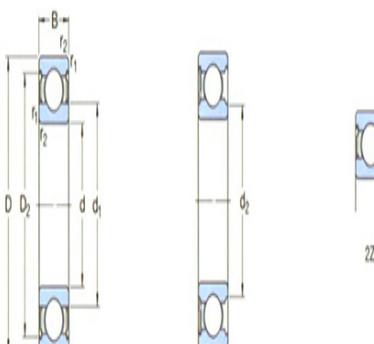r<sub>1,2</sub> the min: 2

2R2

2RS1

2RS1

Shoulder gear and chamfer size

mm

d<sub>a</sub> the min: 139d<sub>a</sub> the max: -

Da the max: 191

r<sub>a</sub> the max: 2

Calculation coefficient

k<sub>r</sub>: 0.025

