

**Model: 6304N**

Basic size of

mm

d:	20
D:	52
B:	15

The basic rated load is

kN

trends C:	16.8
static state Co:	7.8
Fatigue load limit Pu:	0.335

Rated rotation speed is

r/min

Refer to the speed:	30000
Limit speed <sup>1)</sup> :	19000
Mass kg:	0.14



model

Bearing belt stop slot:	*6304N
Stop slot and stop ring:	*6304NR
snap ring:	SP52

Dimensions are

mm

d:	20
d1 ~ :	30.4
D1 ~ :	41.6
D3:	49.73
D4:	57.9
b:	1.35
f:	1.12
C:	2.46
r <sub>1,2</sub> the min:	1.1
r <sub>0</sub> the max:	0.4

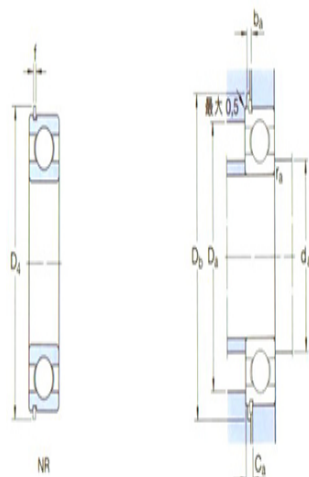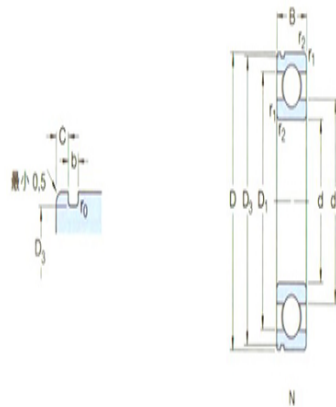

Shoulder gear and chamfer size

mm

d <sub>a</sub> the min:	27
-------------------------	----

Da the max:	45
D <sub>b</sub> the min:	59
b <sub>a</sub> the min:	1.5
Ca the max:	3.58
r <sub>a</sub> the max:	1

Calculation coefficient

k <sub>r</sub> :	0.03
fo:	12