

**Model: 6307N**

Basic size of

mm

|    |    |
|----|----|
| d: | 35 |
| D: | 80 |
| B: | 21 |

The basic rated load is

kN

|                        |       |
|------------------------|-------|
| trends C:              | 35.1  |
| static state Co:       | 19    |
| Fatigue load limit Pu: | 0.815 |

Rated rotation speed is

r/min

|                             |       |
|-----------------------------|-------|
| Refer to the speed:         | 19000 |
| Limit speed <sup>1)</sup> : | 12000 |
| Mass kg:                    | 0.46  |

model

|                          |         |
|--------------------------|---------|
| Bearing belt stop slot:  | *6307N  |
| Stop slot and stop ring: | *6307NR |
| snap ring:               | SP80    |

Dimensions are



mm

|                           |       |
|---------------------------|-------|
| d:                        | 35    |
| d1 ~ :                    | 49.6  |
| D1 ~ :                    | 65.4  |
| D3:                       | 76.81 |
| D4:                       | 86.6  |
| b:                        | 1.9   |
| f:                        | 1.7   |
| C:                        | 3.28  |
| r <sub>1,2</sub> the min: | 1.5   |
| r <sub>0</sub> the max:   | 0.6   |

Shoulder gear and chamfer size

mm

|                         |    |
|-------------------------|----|
| d <sub>a</sub> the min: | 44 |
|-------------------------|----|

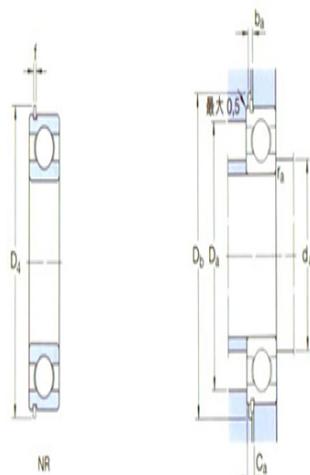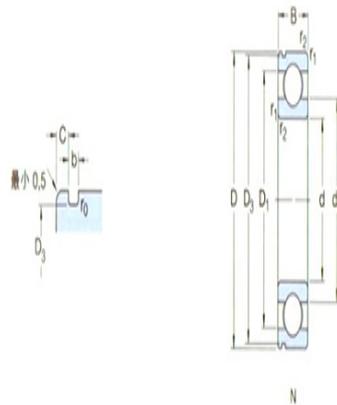

|                         |      |
|-------------------------|------|
| Da the max:             | 71   |
| D <sub>b</sub> the min: | 88   |
| b <sub>a</sub> the min: | 2.2  |
| Ca the max:             | 4.98 |
| r <sub>a</sub> the max: | 1.5  |

Calculation coefficient

|                  |      |
|------------------|------|
| k <sub>r</sub> : | 0.03 |
| fo:              | 13   |