



Model: 6006NR

Basic size of
mm

d:	30
D:	55
B:	13

The basic rated load is
kN

trends C:	13.8
static state Co:	8.3
Fatigue load limit Pu:	0.355

Rated rotation speed is
r/min

Refer to the speed:	28000
Limit speed ¹⁾ :	17000
Mass kg:	0.12

model



Bearing belt stop slot:	*6006N
Stop slot and stop ring:	*6006NR
snap ring:	SP55

Dimensions are
mm

d:	30
d1 ~ :	38.2
D1 ~ :	46.8
D3:	52.6
D4:	60.7
b:	1.35
f:	1.12
C:	2.06
r _{1,2} the min:	1
r ₀ the max:	0.4

Shoulder gear and chamfer size
mm

d _a the min:	34.6
-------------------------	------

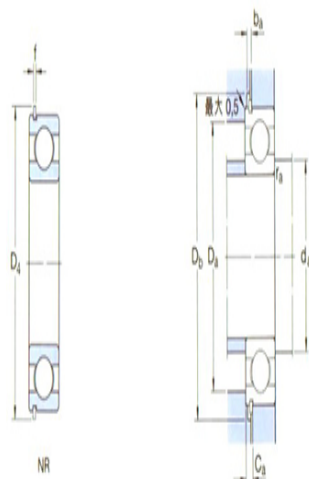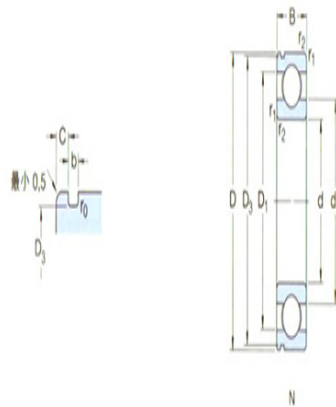

Da the max:	50.4
D _b the min:	62
b _a the min:	1.5
Ca the max:	3.18
r _a the max:	1

Calculation coefficient

k _r :	0.025
fo:	15