



Model: SP62

Basic size of

mm

d:	30
D:	62
B:	16

The basic rated load is

kN

trends C:	20.3
static state Co:	11.2
Fatigue load limit Pu:	0.475

Rated rotation speed is

r/min

Refer to the speed:	24000
Limit speed ¹⁾ :	15000
Mass kg:	0.2



model

Bearing belt stop slot:	*6206N
Stop slot and stop ring:	*6206NR
snap ring:	SP62

Dimensions are

mm

d:	30
d1 ~ :	40.4
D1 ~ :	51.6
D3:	59.61
D4:	67.7
b:	1.9
f:	1.7
C:	3.28
r _{1,2} the min:	1
r ₀ the max:	0.6

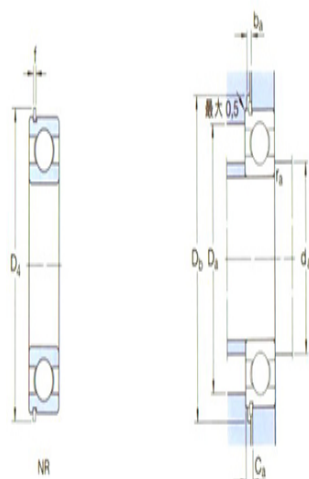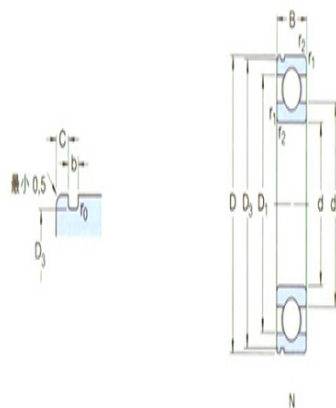

Shoulder gear and chamfer size

mm

d _a the min:	35.6
-------------------------	------

Da the max:	56.4
D _b the min:	69
b _a the min:	2.2
Ca the max:	4.98
r _a the max:	1

Calculation coefficient

k _r :	0.025
fo:	14