



Model: SP68

Basic size of
mm

d:	40
D:	68
B:	15

The basic rated load is
kN

trends C:	17.8
static state Co:	11.6
Fatigue load limit Pu:	0.49

Rated rotation speed is
r/min

Refer to the speed:	22000
Limit speed ¹⁾ :	14000
Mass kg:	0.19

model



Bearing belt stop slot:	*6008N
Stop slot and stop ring:	*6008NR
snap ring:	SP68

Dimensions are
mm

d:	40
d1 ~ :	49.3
D1 ~ :	58.8
D3:	64.82
D4:	74.6
b:	1.9
f:	1.7
C:	2.49
r _{1,2} the min:	1
r ₀ the max:	0.6

Shoulder gear and chamfer size
mm

d _a the min:	44.6
-------------------------	------

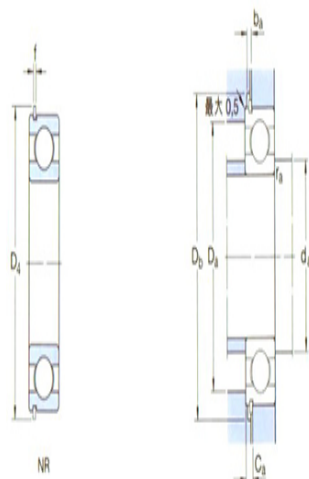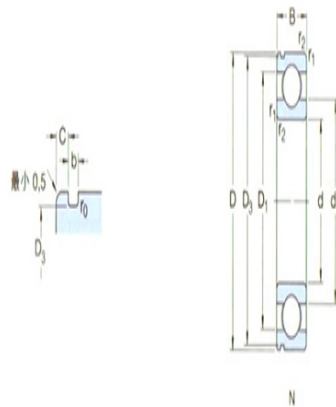

Da the max:	63.4
D _b the min:	76
b _a the min:	2.2
Ca the max:	4.19
r _a the max:	1

Calculation coefficient

k _r :	0.025
fo:	15