



**Model: 6210NR**

Basic size of

mm

d:	50
D:	90
B:	20

The basic rated load is

kN

trends C:	37.1
static state Co:	23.2
Fatigue load limit Pu:	0.98

Rated rotation speed is

r/min

Refer to the speed:	15000
Limit speed <sup>1)</sup> :	10000
Mass kg:	0.46

model

Bearing belt stop slot:	*6210N
Stop slot and stop ring:	*6210NR
snap ring:	SP90

Dimensions are


mm

d:	50
d1 ~ :	62.5
D1 ~ :	77.4
D3:	86.79
D4:	96.5
b:	2.7
f:	2.46
C:	3.28
r <sub>1,2</sub> the min:	1.1
r <sub>0</sub> the max:	0.6

Shoulder gear and chamfer size

mm

d <sub>a</sub> the min:	57
-------------------------	----

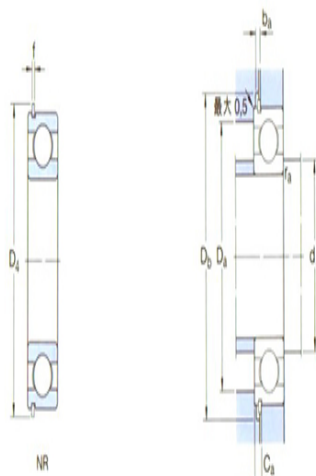

Da the max:	83
D <sub>b</sub> the min:	98
b <sub>a</sub> the min:	3
Ca the max:	5.74
r <sub>a</sub> the max:	1

Calculation coefficient

k <sub>r</sub> :	0.025
fo:	14