


## Model: SP150

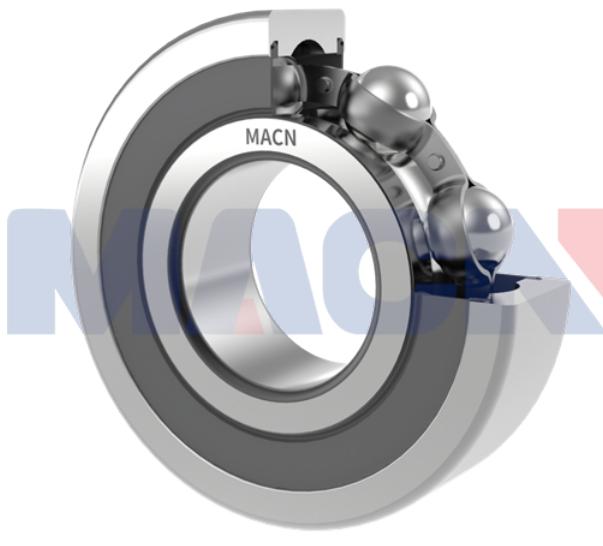

Basic size of

mm

d:	60
D:	150
B:	35

The basic rated load is

kN

trends C:	108
static state Co:	69.5
Fatigue load limit	
Pu:	2.9

Rated rotation speed is

r/min

Refer to the speed: 10000

Limit speed <sup>1)</sup>: 6300



Mass kg: 2.75

model

Bearing belt stop slot:	6412N
Stop slot and stop ring:	6412NR
snap ring:	SP150

Dimensions are

mm

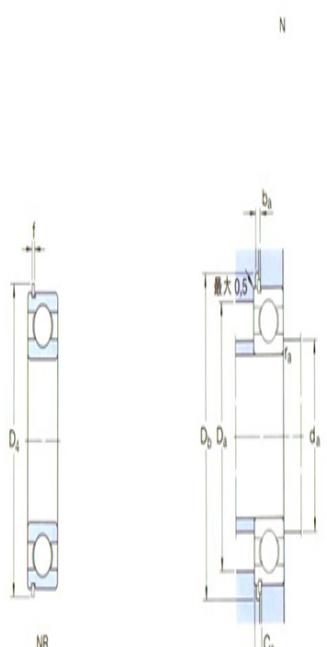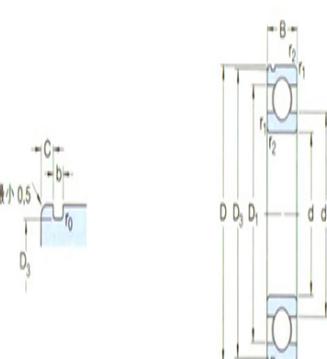

d:	60
d1 ~ :	88.1
D1 ~ :	122
D3:	145.24
D4:	159.7
b:	3.1
f:	2.82
C:	4.9
r <sub>1,2</sub> the min:	2.1
r <sub>0</sub> the max:	0.6

Shoulder gear and chamfer size

mm

d<sub>a</sub> the min: 74

Da the max:	136
D <sub>b</sub> the min:	162
b <sub>a</sub> the min:	3.5
C <sub>a</sub> the max:	7.72
r <sub>a</sub> the max:	2

#### Calculation coefficient

k <sub>r</sub> :	0.035
f <sub>o</sub> :	12