


## Model: 6020N

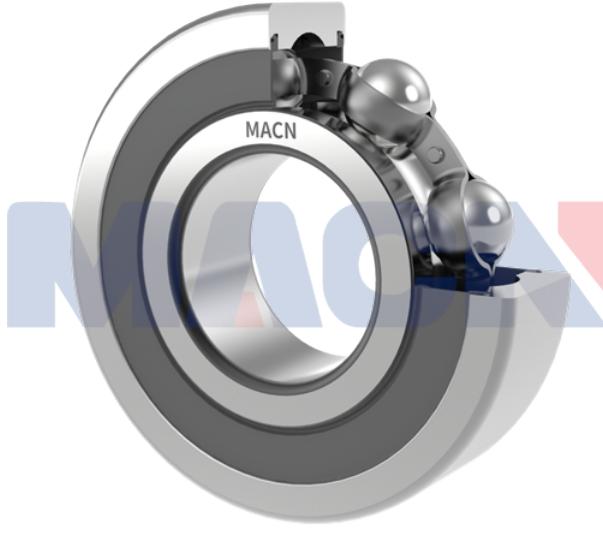

Basic size of

mm

d: 100

D: 150

B: 24

The basic rated load is

kN

trends C: 63.7

static state Co: 54

Fatigue load limit  
Pu: 2.04

Rated rotation speed is

r/min

Refer to the speed: 9500



Limit speed <sup>1)</sup>: 5600Mass  
kg: 1.25

model

Bearing belt stop slot: \*6020N

Stop slot and stop ring: \*6020NR

snap ring: SP150

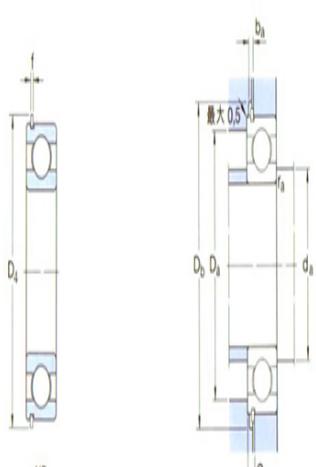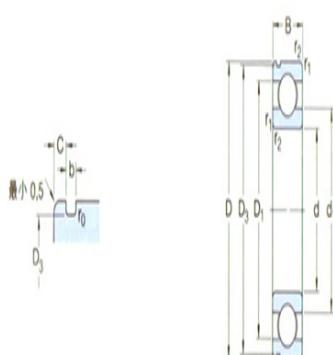

Dimensions are

mm

d: 100

d1 ~ : 116

D1 ~ : 134

D3: 145.24

D4: 159.7

b: 3.1

f: 2.82

C: 3.71

r1,2 the min: 1.5

r0 the max: 0.6

Shoulder gear and chamfer size

mm

da the min: 107

Da the max:	143
D <sub>b</sub> the min:	162
b <sub>a</sub> the min:	3.5
C <sub>a</sub> the max:	6.53
r <sub>a</sub> the max:	1.5

#### Calculation coefficient

k <sub>r</sub> :	0.025
f <sub>o</sub> :	16