



**Model: 6022NR**

Basic size of

mm

d:	110
D:	170
B:	28

The basic rated load is

kN

trends C:	85.2
static state Co:	73.5
Fatigue load limit Pu:	2.6

Rated rotation speed is

r/min

Refer to the speed:	8000
Limit speed <sup>1)</sup> :	5000
Mass kg:	1.95

model

Bearing belt stop slot:	*6022N
Stop slot and stop ring:	*6022NR
snap ring:	SP170

Dimensions are



mm

d:	110
d1 ~ :	129
D1 ~ :	151
D3:	163.65
D4:	182.9
b:	3.5
f:	3.1
C:	3.71
r <sub>1,2</sub> the min:	2
r <sub>0</sub> the max:	0.6

Shoulder gear and chamfer size

mm

d <sub>a</sub> the min:	119
-------------------------	-----

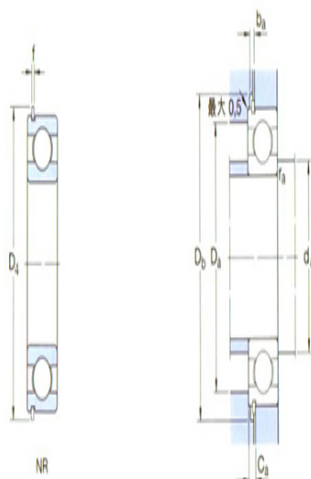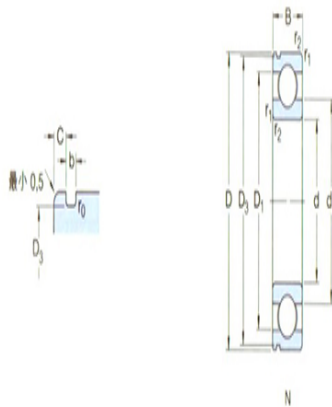

Da the max:	161
D <sub>b</sub> the min:	185
b <sub>a</sub> the min:	4
Ca the max:	6.81
r <sub>a</sub> the max:	2

Calculation coefficient

k <sub>r</sub> :	0.025
fo:	16