


Model: SP62

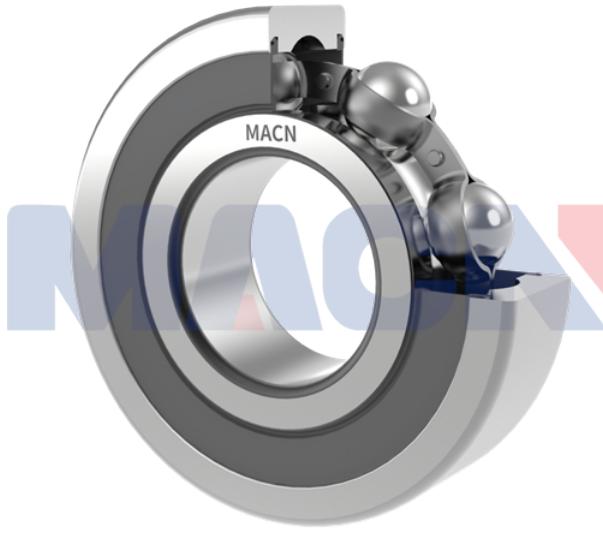

Basic size of

mm

d: 25

D: 62

B: 17

The basic rated load is

kN

trends C: 23.4

static state Co: 11.6

Fatigue load limit

0.49

Pu:

Rated rotation speed is

r/min

Refer to the speed: 24000

Limit speed ¹⁾: 16000Mass
kg: 0.23

model



Bearing belt stop slot: *6305-ZNR

Stop slot and stop
ring: *6305-
2ZNR

snap ring: SP62

Dimensions are

mm

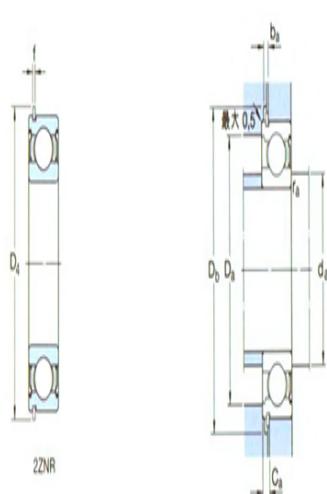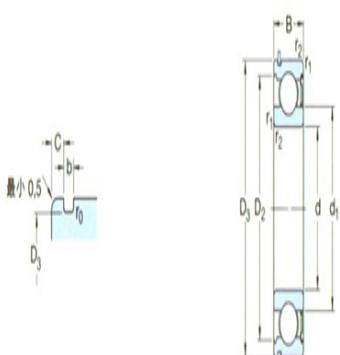

d: 25

d1 ~ : 36.6

D1 ~ : 52.7

D3: 59.61

D4: 67.7

b: 1.9

f: 1.7

C: 3.28

r1,2 the min: 1.1

r0 the max: 0.6

Shoulder gear and chamfer size

mm

d _a the min:	32
D _a the max:	55
D _b the min:	69
b _a the min:	2.2
C _a the max:	4.98
r _a the max:	1

Calculation coefficient

k _r :	0.03
f _o :	12