



**Model: 308-2ZNR**

Basic size of  
 mm

d:	40
D:	90
B:	23

The basic rated load is  
 kN



trends C:	46.8
static state Co:	36
Fatigue load limit Pu:	1.53

Rated rotation speed is  
 r/min

Refer to the speed:	14000
Limit speed <sup>1)</sup> :	9000
Mass kg:	0.64

model

Bearing open type:	308NR
Dust cover on one side:	308-ZNR
There are dust covers on both sides:	308-2ZNR
snap ring:	SP90

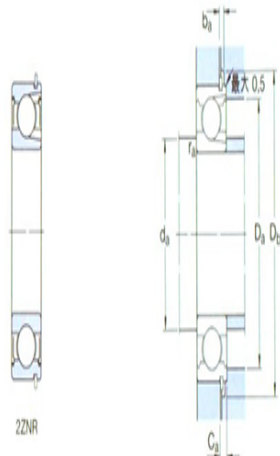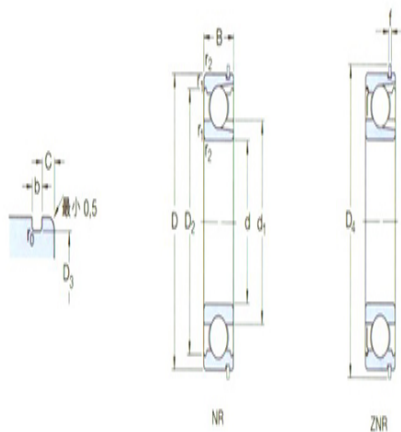

Dimensions are  
 mm

d:	40
d1 ~ :	50.5
D2 ~ :	77.7
D3:	86.79
D4:	96.5
f:	2.46
b:	2.7
C:	3.28
r <sub>0</sub> the max:	0.6
r <sub>1,2</sub> the min:	1.5

Shoulder gear and chamfer size  
mm

$d_a$ the min:	48
$D_a$ the max:	82
$D_b$ the min:	98
$b_a$ the min:	3
$C_a$ the max:	5.74
$r_a$ the max:	1.5