



## Model: 7201BECBP

Basic size of  
mm


|    |    |
|----|----|
| d: | 12 |
| D: | 32 |
| B: | 10 |

The basic rated load is  
kN

|                           |      |
|---------------------------|------|
| trends C:                 | 7.61 |
| static state Co:          | 3.8  |
| Fatigue load limit<br>Pu: | 0.16 |

Rated rotation speed is  
r/min

|                     |       |
|---------------------|-------|
| Refer to the speed: | 26000 |
| limit speed:        | 26000 |
| Mass<br>kg:         | 0.036 |

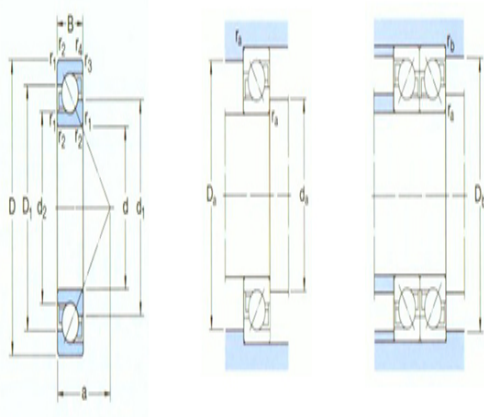

Model number <sup>1)</sup>

|                                   |               |
|-----------------------------------|---------------|
| General distribution<br>bearings: | 7201BECB<br>P |
| Basic design bearings:            | 7201BEP       |

Dimensions are  
mm

|                           |      |
|---------------------------|------|
| d:                        | 12   |
| d1 ~ :                    | 20.2 |
| d2 ~ :                    | 16.6 |
| D1 ~ :                    | 25   |
| r <sub>1,2</sub> the min: | 0.6  |
| r <sub>3,4</sub> the min: | 0.3  |
| a:                        | 14.4 |

Shoulder gear and chamfer size  
mm

|                         |      |
|-------------------------|------|
| d <sub>a</sub> the min: | 16.2 |
| Da the max:             | 27.8 |
| D <sub>b</sub> the max: | 29.6 |
| r <sub>a</sub> the max: | 0.6  |
| r <sub>b</sub> the max: | 0.3  |

