



## Model: 7304BEY

Basic size of  
mm


|    |    |
|----|----|
| d: | 20 |
| D: | 52 |
| B: | 15 |

The basic rated load is  
kN

|                           |      |
|---------------------------|------|
| trends C:                 | 19   |
| static state Co:          | 10.4 |
| Fatigue load limit<br>Pu: | 0.44 |

Rated rotation speed is  
r/min

|                     |       |
|---------------------|-------|
| Refer to the speed: | 16000 |
| limit speed:        | 16000 |
| Mass<br>kg:         | 0.15  |

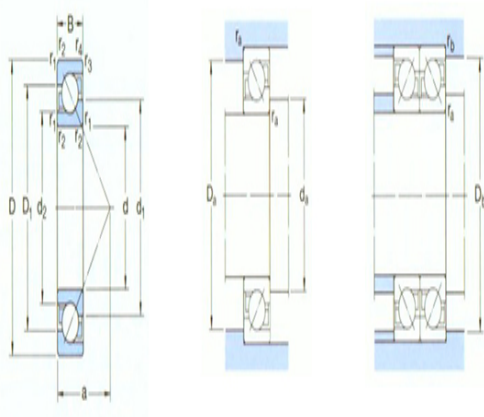

Model number <sup>1)</sup>

|                                   |               |
|-----------------------------------|---------------|
| General distribution<br>bearings: | 7304BECB<br>Y |
| Basic design bearings:            | 7304BEY       |

Dimensions are  
mm

|                           |      |
|---------------------------|------|
| d:                        | 20   |
| d1 ~ :                    | 33.3 |
| d2 ~ :                    | 26.8 |
| D1 ~ :                    | 40.4 |
| r <sub>1,2</sub> the min: | 1.1  |
| r <sub>3,4</sub> the min: | 0.6  |
| a:                        | 22.8 |

Shoulder gear and chamfer size  
mm

|                         |      |
|-------------------------|------|
| d <sub>a</sub> the min: | 27   |
| Da the max:             | 45   |
| D <sub>b</sub> the max: | 47.8 |
| r <sub>a</sub> the max: | 1    |
| r <sub>b</sub> the max: | 0.6  |

