



Model: 7312BECBM

Basic size of
mm


| | |
|----|-----|
| d: | 60 |
| D: | 130 |
| B: | 31 |

The basic rated load is
kN

| | |
|---------------------------|------|
| trends C: | 104 |
| static state Co: | 76.5 |
| Fatigue load limit Pu: | 3.2 |

Rated rotation speed is
r/min

| | |
|---------------------|------|
| Refer to the speed: | 6700 |
| limit speed: | 6700 |
| Mass kg: | 1.88 |

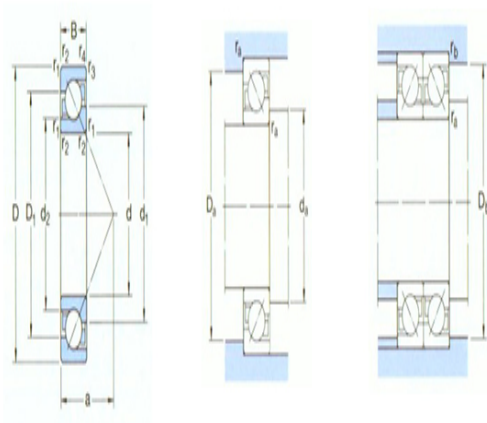

Model number ¹⁾

| | |
|-----------------------------------|----------------|
| General distribution bearings: | *7312BECB M |
| Basic design bearings: | - |

Dimensions are
mm

| | |
|---------------------------|-------|
| d: | 60 |
| d1 ~ : | 87.3 |
| d2 ~ : | 72.6 |
| D1 ~ : | 104.8 |
| r _{1,2} the min: | 2.1 |
| r _{3,4} the min: | 1.1 |
| a: | 55 |

Shoulder gear and chamfer size
mm

| | |
|-------------------------|-----|
| d _a the min: | 72 |
| Da the max: | 118 |
| D _b the max: | 123 |
| r _a the max: | 2 |

r_b the max:

1