


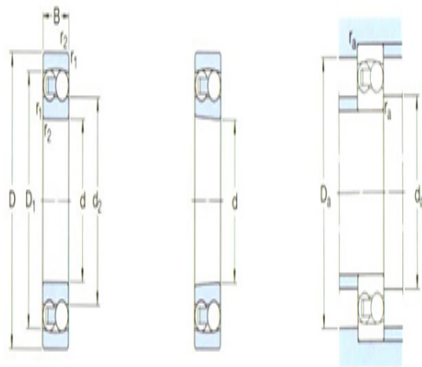

## Model: 2201E-2RS1TN9

Basic size of  
mm

|    |    |
|----|----|
| d: | 12 |
| D: | 32 |
| B: | 14 |

The basic rated load is  
kN

|                           |       |
|---------------------------|-------|
| trends C:                 | 6.24  |
| static state Co:          | 1.43  |
| Fatigue load limit<br>Pu: | 0.08  |
| limit speed:              | 16000 |
| Mass<br>kg:               | 0.053 |

model

|               |                   |
|---------------|-------------------|
| Column hole:  | 2201E-<br>2RS1TN9 |
| conical bore: | -                 |

Dimensions are  
mm

|                           |      |
|---------------------------|------|
| d:                        | 12   |
| d2 ~ :                    | 15.5 |
| D1 ~ :                    | 27.4 |
| r <sub>1,2</sub> the min: | 0.6  |

Shoulder gear and chamfer size  
mm

|                         |      |
|-------------------------|------|
| d <sub>a</sub> the min: | 15.5 |
| d <sub>a</sub> the max: | 15.5 |
| Da the max:             | 27.8 |
| r <sub>a</sub> the max: | 0.6  |

Calculation coefficient

|     |      |
|-----|------|
| e:  | 0.33 |
| Y1: | 1.9  |
| Y2: | 3    |
| Y0: | 2    |