



Model: 2206E-2RS1KTN9

Basic size of
 mm

d:	25
D:	62
B:	20

The basic rated load is
 kN

trends C:	15.6
static state Co:	4.65
Fatigue load limit Pu:	0.24

Rated rotation speed is
 r/min

Refer to the speed:	-
limit speed:	7500
Mass bearing + tightening sleeve:	0.36

model


bearing:	2206E-2RS1KTN9
tapered adapter-sleeve:	H306C

Dimensions are
 mm

d ₁ :	25
d ₃ :	45
D1 ~ :	54.1
B1:	31
B2:	8.5
r _{1,2} the min:	1

Shoulder gear and chamfer size
 mm

d _a the max:	36
d _b the min:	33
Da the max:	56.4
B _a the min:	5
r _a the max:	1

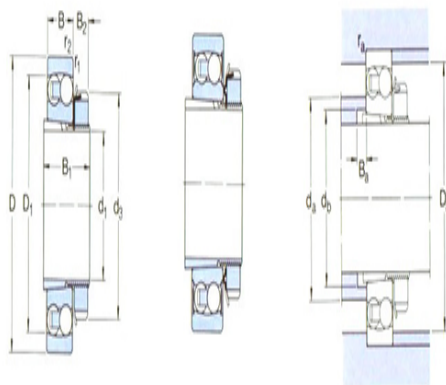

Calculation coefficient

e:	0.25
Y1:	2.5
Y2:	3.9
Y0:	2.5