



## Model: H308

Basic size of  
mm

d:	35
D:	80
B:	23

The basic rated load is  
kN


trends C:	31.9
static state Co:	10
Fatigue load limit Pu:	0.51

Rated rotation speed is  
r/min

Refer to the speed:	16000
limit speed:	11000
Mass bearing + tightening sleeve:	0.58

model

bearing:	2208EKTN 9
tapered adapter- sleeve:	H308

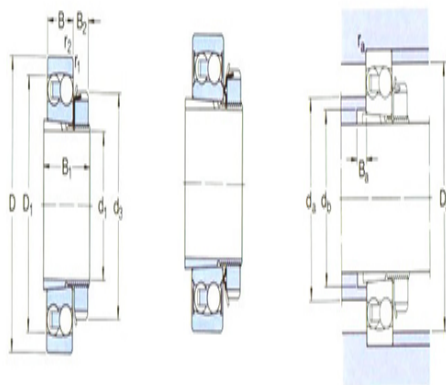

Dimensions are  
mm

d <sub>1</sub> :	35
d <sub>3</sub> :	58
D1 ~ :	71.6
B1:	36
B2:	10
r <sub>1,2</sub> the min:	1.1

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the max:	52
d <sub>b</sub> the min:	44
Da the max:	73
B <sub>a</sub> the min:	6
r <sub>a</sub> the max:	1

#### Calculation coefficient

e:	0.28
Y1:	2.2
Y2:	3.5
Y0:	2.5