



## Model: H313

Basic size of  
mm

d:	60
D:	120
B:	31

The basic rated load is  
kN

trends C:	57.2
static state Co:	20
Fatigue load limit Pu:	1.02

Rated rotation speed is  
r/min

Refer to the speed:	10000
limit speed:	7000
Mass bearing + tightening sleeve:	1.8

model


bearing:	2213EKTN 9
tapered adapter- sleeve:	H313

Dimensions are  
mm

d <sub>1</sub> :	60
d <sub>3</sub> :	85
D1 ~ :	107
B1:	50
B2:	14
r <sub>1,2</sub> the min:	1.5

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the max:	80
d <sub>b</sub> the min:	70
Da the max:	111
B <sub>a</sub> the min:	9
r <sub>a</sub> the max:	1.5

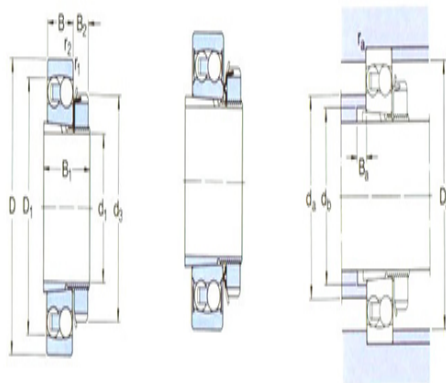

#### Calculation coefficient

e:	0.24
Y1:	2.6
Y2:	4.1
Y0:	2.8