


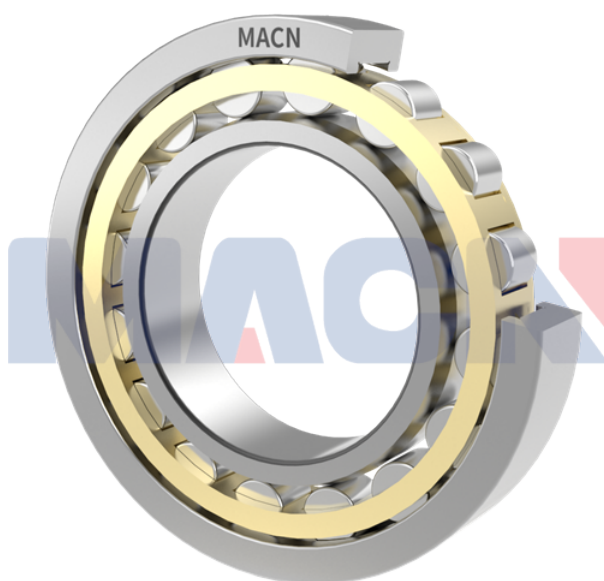

Model: NU2205ECP

Basic size of
mm

d:	25
D:	52
B:	18

The basic rated load is
kN

trends C:	34.1
static state Co:	34
Fatigue load limit Pu:	4.25

Rated rotation speed is
r/min

Refer to the speed:	14000
limit speed:	16000
Specification standard holder:	0.17

model


Standard holder:	NU2205EC P
Other holder 1):	ML

Dimensions are
mm

d:	25
$d_1 \sim$:	34.7
$D_1 \sim$:	43.8
F,E:	31.5
$r_{1,2}$ the min:	1
$r_{3,4}$ the min:	0.6
$s^{1)}$:	1.8

Shoulder gear and chamfer size
mm


d_a the min:	29.2
d_a the max:	30
d_b, D_a the min:	33
D_a the max:	46.4

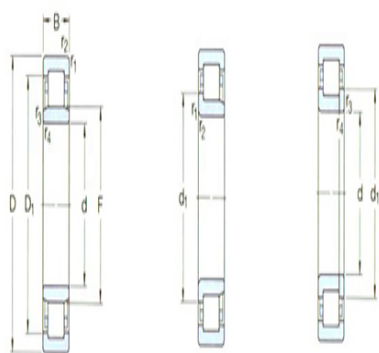


NU

NU

NUP

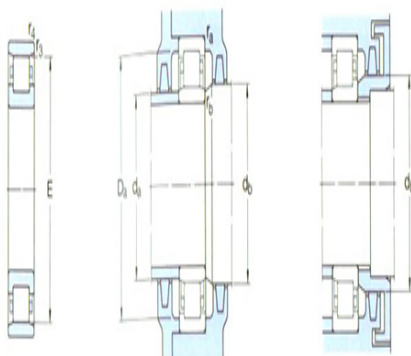

N

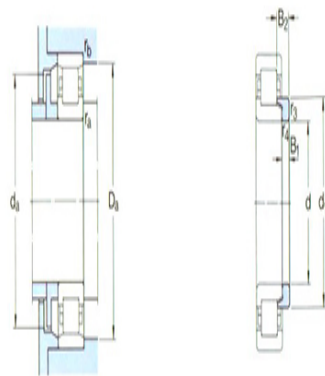

1/1

r_a the max:	1
r_b the max:	0.6

Calculation coefficient

kr:	0.2
-----	-----

Corner circle

model:	HJ2205EC
quality:	0.014
Size B1:	3
Size B2:	6.5