


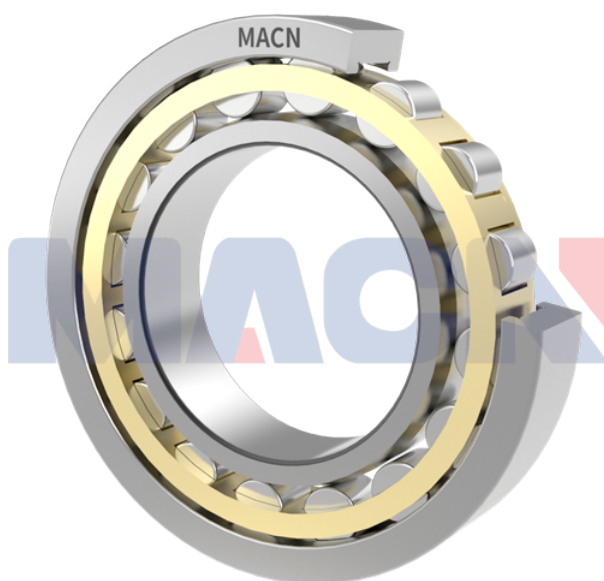

Model: NJ2205ECP

Basic size of
mm

d:	25
D:	52
B:	18

The basic rated load is
kN

trends C:	34.1
static state Co:	34
Fatigue load limit Pu:	4.25

Rated rotation speed is
r/min

Refer to the speed:	14000
limit speed:	16000
Specification standard holder:	0.18

model



Standard holder:	NJ2205EC P
Other holder 1):	ML


Dimensions are
mm

d:	25
d ₁ ~ :	34.7
D1 ~ :	43.8
F,E:	31.5
r _{1,2} the min:	1
r _{3,4} the min:	0.6
s ¹⁾ :	1.8

Shoulder gear and chamfer size
mm

d _a the min:	30
d _a the max:	30
d _b ,Da the min:	36
Da the max:	46.4

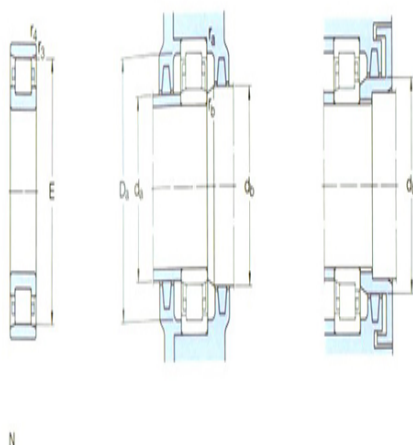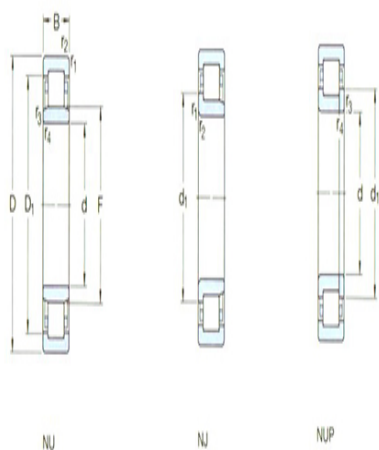

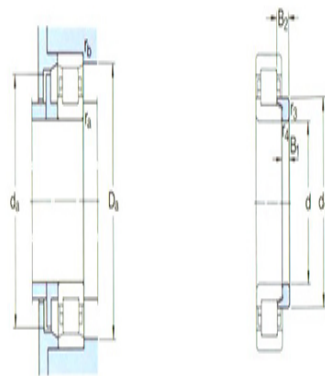

8/8

r_a the max:	1
r_b the max:	0.6

Calculation coefficient

kr:	0.2
-----	-----

Corner circle

model:	HJ2205EC
quality:	0.014
Size B1:	3
Size B2:	6.5