


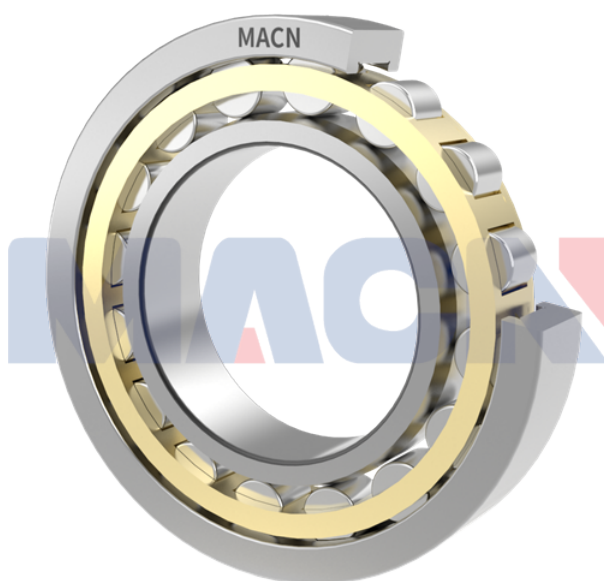

Model: NUP305ECP

Basic size of
mm

d:	25
D:	62
B:	17

The basic rated load is
kN

trends C:	46.5
static state Co:	36.5
Fatigue load limit Pu:	4.55

Rated rotation speed is
r/min

Refer to the speed:	12000
limit speed:	15000
Specification standard holder:	0.25

model


Standard holder:	*NUP305EC P
Other holder 1):	J,ML

Dimensions are
mm

d:	25
d ₁ ~ :	38.1
D1 ~ :	50.7
F,E:	34
r _{1,2} the min:	1.1
r _{3,4} the min:	1.1
s ¹⁾ :	-

Shoulder gear and chamfer size
mm


d _a the min:	32
d _a the max:	-
d _b ,Da the min:	40
Da the max:	55

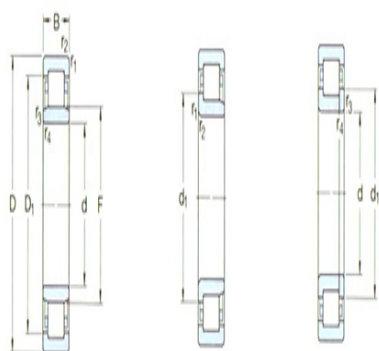


NU

NU

NUP

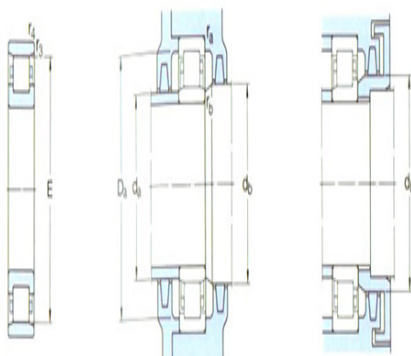

N

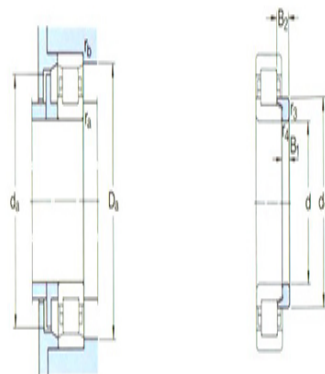

1/1

r_a the max:	1
r_b the max:	1

Calculation coefficient

kr:	0.15
-----	------

Corner circle

model:	-
quality:	-
Size B1:	-
Size B2:	-