


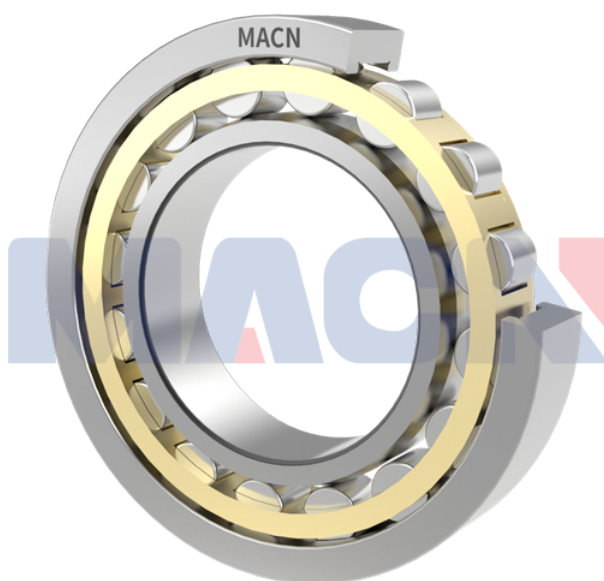

Model: N305ECP

Basic size of
mm

d:	25
D:	62
B:	17

The basic rated load is
kN

trends C:	46.5
static state Co:	36.5
Fatigue load limit Pu:	4.55

Rated rotation speed is
r/min

Refer to the speed:	12000
limit speed:	15000
Specification standard holder:	0.24

model


Standard holder:	*N305EC P
Other holder 1):	-

Dimensions are
mm

d:	25
d ₁ ~ :	38.1
D1 ~ :	-
F,E:	54
r _{1,2} the min:	1.1
r _{3,4} the min:	1.1
s ¹⁾ :	1.3

Shoulder gear and chamfer size
mm


d _a the min:	32
d _a the max:	52
d _b ,Da the min:	56
Da the max:	55

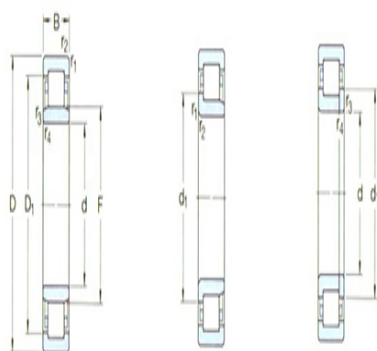


NU

NJ

NUP

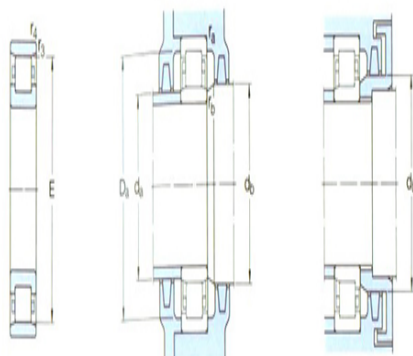

N

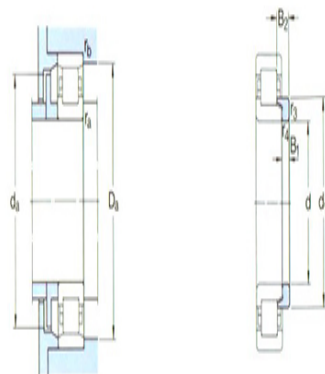

1/1

r_a the max:	1
r_b the max:	1

Calculation coefficient	
kr:	0.15

Corner circle	
model:	-
quality:	-
Size B1:	-
Size B2:	-