


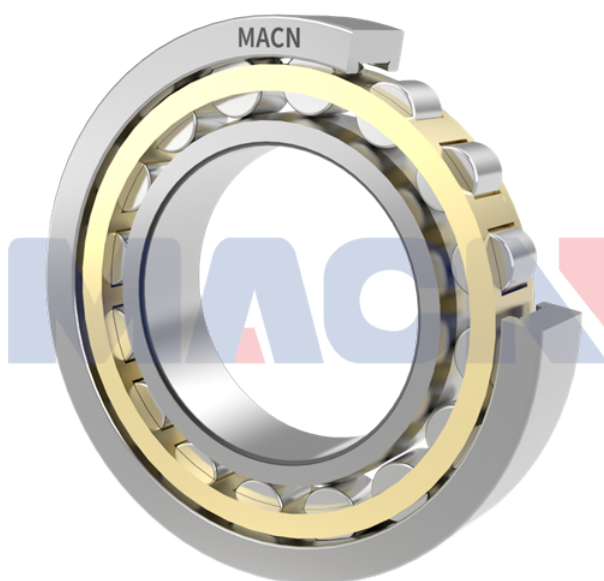

Model: NU2305ECP

Basic size of
mm

d:	25
D:	62
B:	24

The basic rated load is
kN

trends C:	64
static state Co:	55
Fatigue load limit Pu:	6.95

Rated rotation speed is
r/min

Refer to the speed:	12000
limit speed:	15000
Specification standard holder:	0.38

model


Standard holder:	*NU2305EC P
Other holder 1):	J,ML

Dimensions are
mm

d:	25
d ₁ ~ :	38.1
D1 ~ :	50.7
F,E:	34
r _{1,2} the min:	1.1
r _{3,4} the min:	1.1
s ¹⁾ :	2.3

Shoulder gear and chamfer size
mm


d _a the min:	32
d _a the max:	32
d _b ,Da the min:	36
Da the max:	55

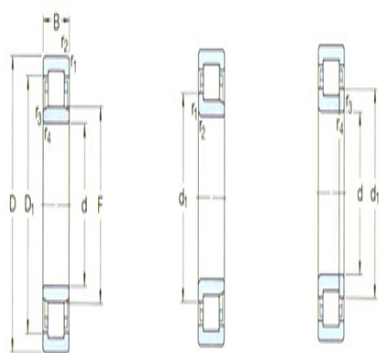


NU

NJ

NUP

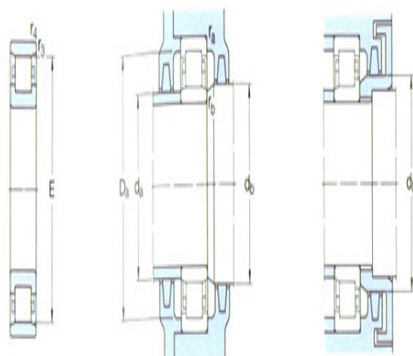

N

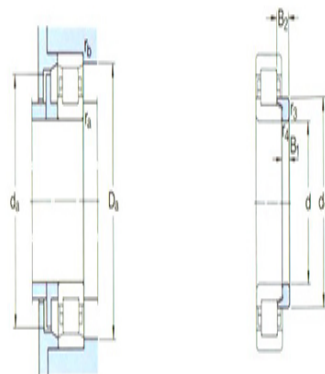

8/10

r_a the max:	1
r_b the max:	1

Calculation coefficient

kr:	0.25
-----	------

Corner circle

model:	HJ2305EC
quality:	0.025
Size B1:	4
Size B2:	8