



**Model: NUP2307ECP**

Basic size of  
 mm

d:	35
D:	80
B:	31

The basic rated load is  
 kN

trends C:	106
static state Co:	98
Fatigue load limit Pu:	12.7

Rated rotation speed is  
 r/min

Refer to the speed:	9500
limit speed:	11000
Specification standard holder:	0.75

model



Standard holder:	*NUP2307ECP
Other holder 1):	-


Dimensions are  
 mm

d:	35
d <sub>1</sub> ~ :	51
D1 ~ :	66.3
F,E:	46.2
r <sub>1,2</sub> the min:	1.5
r <sub>3,4</sub> the min:	1.1
s <sup>1)</sup> :	-

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	44
d <sub>a</sub> the max:	-
d <sub>b</sub> ,D <sub>a</sub> the min:	53
D <sub>a</sub> the max:	71

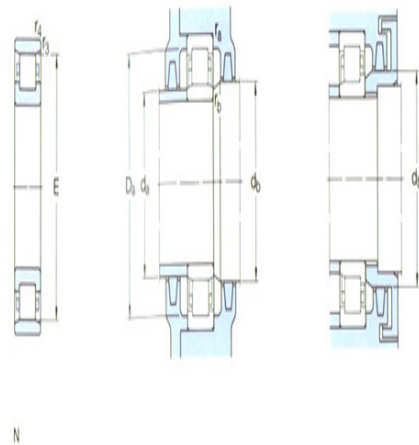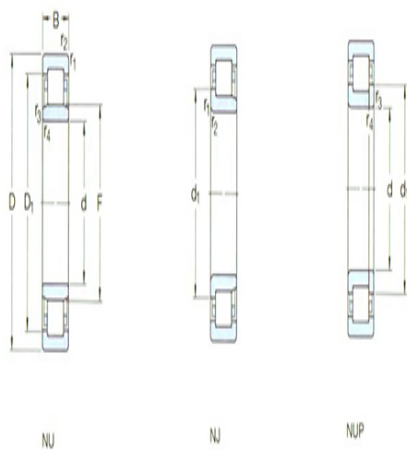

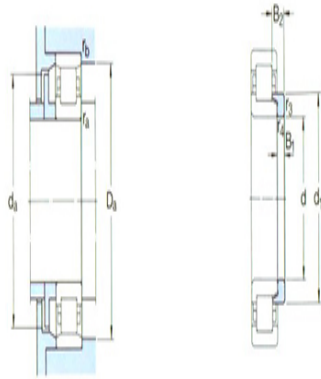

1/1

$r_a$  the max: 1.5

$r_b$  the max: 1

Calculation coefficient

kr: 0.25

Corner circle

model: -

quality: -

Size B1: -

Size B2: -