



Model: NU2308ECP

Basic size of
 mm

d:	40
D:	90
B:	33

The basic rated load is
 kN

trends C:	129
static state Co:	120
Fatigue load limit Pu:	15.3

Rated rotation speed is
 r/min

Refer to the speed:	8000
limit speed:	9500
Specification standard holder:	0.94

model



Standard holder:	*NU2308ECP
Other holder 1):	J,M,ML

Dimensions are
 mm

d:	40
d ₁ ~ :	-
D1 ~ :	75.6
F,E:	52
r _{1,2} the min:	1.5
r _{3,4} the min:	1.5
s ¹⁾ :	2.9

Shoulder gear and chamfer size
 mm

d _a the min:	49
d _a the max:	50
d _b ,D _a the min:	54
D _a the max:	81

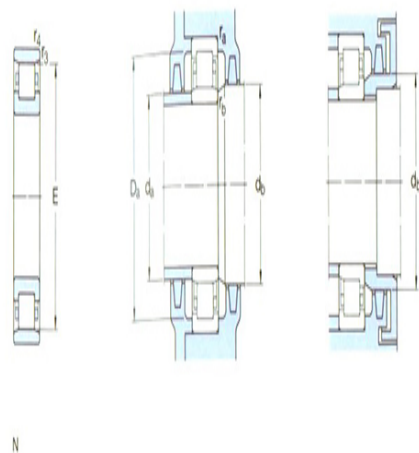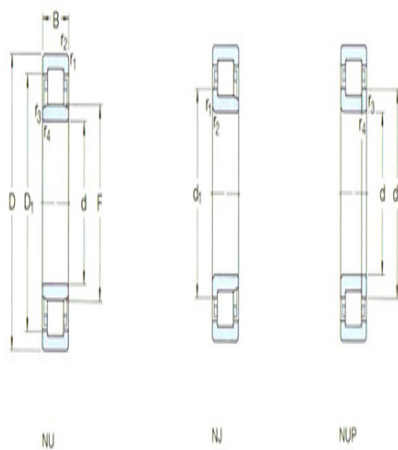



角鋼

r_a the max: 1.5

r_b the max: 1.5

Calculation coefficient

kr: 0.25

Corner circle

model: -

quality:

Size B1:

Size B2: