



Model: NUP2308ECP

Basic size of
 mm

d:	40
D:	90
B:	33

The basic rated load is
 kN

trends C:	129
static state Co:	120
Fatigue load limit Pu:	15.3

Rated rotation speed is
 r/min

Refer to the speed:	8000
limit speed:	9500
Specification standard holder:	0.98

model


Standard holder:	*NUP2308ECP
Other holder 1):	M,ML

Dimensions are
 mm

d:	40
d ₁ ~ :	57.5
D1 ~ :	75.6
F,E:	52
r _{1,2} the min:	1.5
r _{3,4} the min:	1.5
s ¹⁾ :	-

Shoulder gear and chamfer size
 mm


d _a the min:	49
d _a the max:	-
d _b ,D _a the min:	60
D _a the max:	81

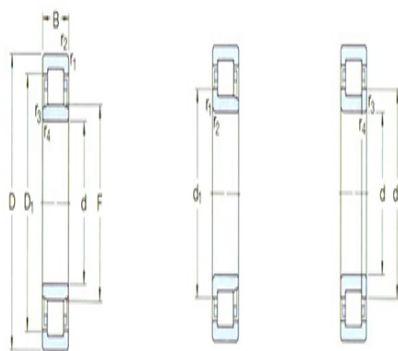


NU

N

NUP

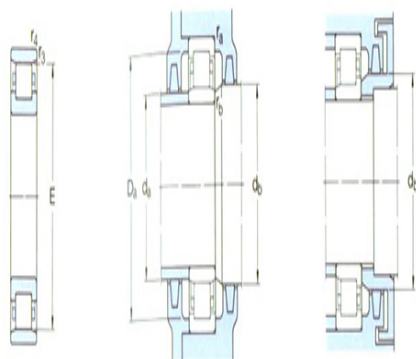

N

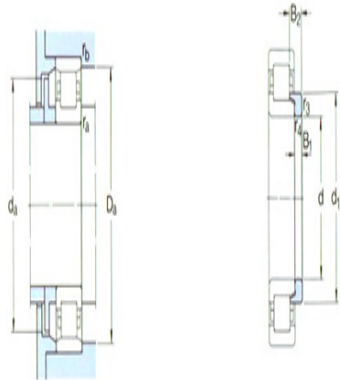

角鋼

r_a the max: 1.5

r_b the max: 1.5

Calculation coefficient

kr: 0.25

Corner circle

model: -

quality: -

Size B1: -

Size B2: -