



Model: NJ408

Basic size of
mm

| | |
|----|-----|
| d: | 40 |
| D: | 110 |
| B: | 27 |

The basic rated load is
kN

| | |
|------------------------|------|
| trends C: | 96.8 |
| static state Co: | 90 |
| Fatigue load limit Pu: | 11.6 |

Rated rotation speed is
r/min

| | |
|--------------------------------|------|
| Refer to the speed: | 7000 |
| limit speed: | 8500 |
| Specification standard holder: | 1.35 |

model


| | |
|------------------|-------|
| Standard holder: | NJ408 |
| Other holder 1): | - |

Dimensions are
mm

| | |
|---------------------------|------|
| d: | 40 |
| d ₁ ~ : | 64.8 |
| D1 ~ : | 84.2 |
| F,E: | 58 |
| r _{1,2} the min: | 2 |
| r _{3,4} the min: | 2 |
| s ¹⁾ : | 2.5 |

Shoulder gear and chamfer size
mm


| | |
|-----------------------------|----|
| d _a the min: | 53 |
| d _a the max: | 56 |
| d _b ,Da the min: | 67 |
| Da the max: | 97 |

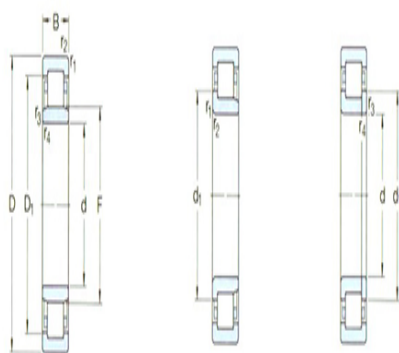


NU

NJ

NUP

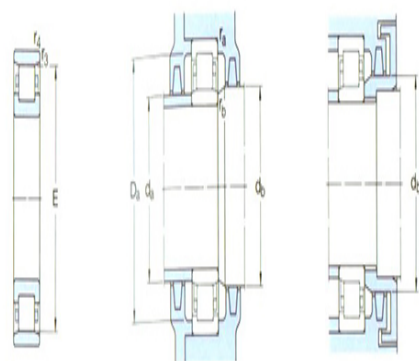

N

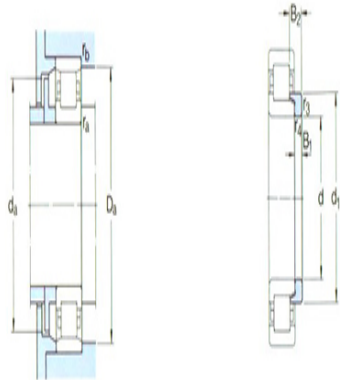

角鋼

r_a the max: 2

r_b the max: 2

Calculation coefficient

kr: 0.15

Corner circle

model: -

quality: -

Size B1: -

Size B2: -