



Model: NU1009ECP

Basic size of
 mm

d:	45
D:	75
B:	16

The basic rated load is
 kN

trends C:	44.6
static state Co:	52
Fatigue load limit Pu:	6.3

Rated rotation speed is
 r/min

Refer to the speed:	9500
limit speed:	11000
Specification standard holder:	0.26

model



Standard holder:	NU1009ECP
Other holder 1):	-


Dimensions are
 mm

d:	45
d ₁ ~ :	-
D1 ~ :	65.3
F,E:	52.5
r _{1,2} the min:	1
r _{3,4} the min:	0.6
s ¹⁾ :	0.9

Shoulder gear and chamfer size
 mm

d _a the min:	48.2
d _a the max:	51
d _b ,D _a the min:	54
D _a the max:	70.4

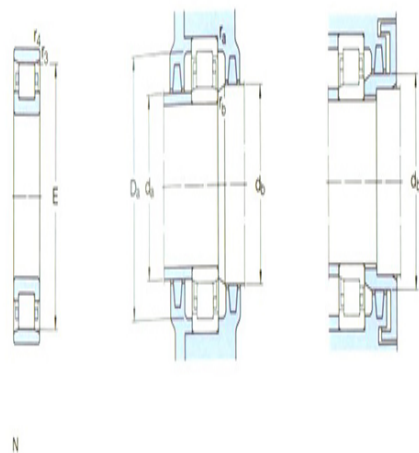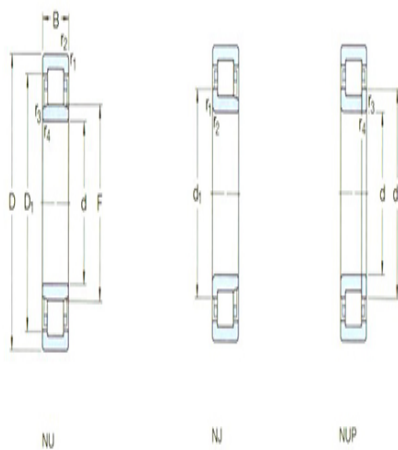

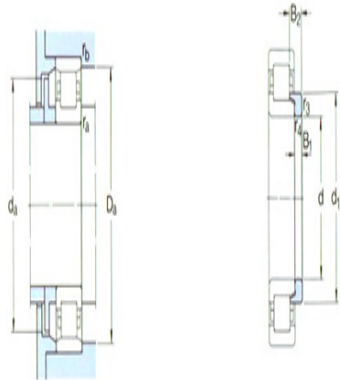

角鋼

r_a the max: 1

r_b the max: 0.6

Calculation coefficient

kr: 0.1

Corner circle

model: -

quality: -

Size B1: -

Size B2: -