



Model: NU209ECP

Basic size of
 mm

d:	45
D:	85
B:	19

The basic rated load is
 kN

trends C:	69.5
static state Co:	64
Fatigue load limit Pu:	8.15

Rated rotation speed is
 r/min

Refer to the speed:	9000
limit speed:	9500
Specification standard holder:	0.48

model


Standard holder:	*NU209EC P
Other holder 1):	J,M,ML

Dimensions are
 mm

d:	45
d ₁ ~ :	59
D1 ~ :	73
F,E:	54.5
r _{1,2} the min:	1.1
r _{3,4} the min:	1.1
s ¹⁾ :	1.2

Shoulder gear and chamfer size
 mm


d _a the min:	52
d _a the max:	53
d _b ,D _a the min:	56
D _a the max:	78

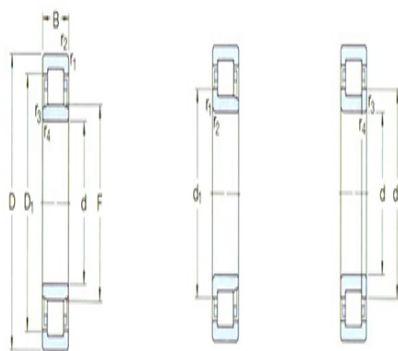


NU

N

NUP

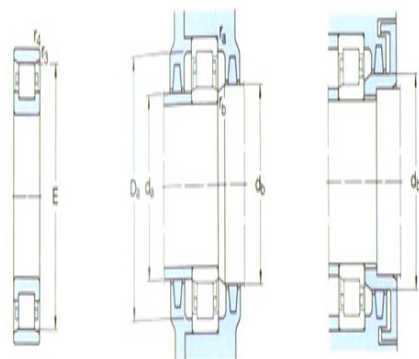

N

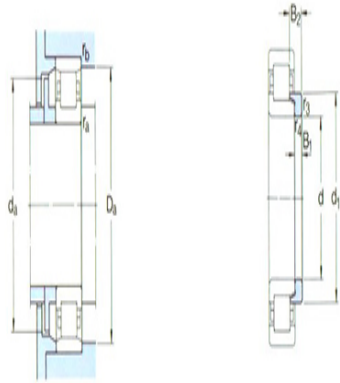

角鋼

r_a the max: 1

r_b the max: 1

Calculation coefficient

kr: 0.15

Corner circle

model: HJ209EC

quality: 0.052

Size B1: 5

Size B2: 8.5