



**Model: NUP209ECP**

Basic size of  
 mm

d:	45
D:	85
B:	19

The basic rated load is  
 kN

trends C:	69.5
static state Co:	64
Fatigue load limit Pu:	8.15

Rated rotation speed is  
 r/min

Refer to the speed:	9000
limit speed:	9500
Specification standard holder:	0.45

model



Standard holder:	*NUP209ECP
Other holder 1):	J,M,ML

Dimensions are  
 mm

d:	45
d <sub>1</sub> ~ :	59
D1 ~ :	73
F,E:	54.5
r <sub>1,2</sub> the min:	1.1
r <sub>3,4</sub> the min:	1.1
s <sup>1)</sup> :	-

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	52
d <sub>a</sub> the max:	-
d <sub>b</sub> ,D <sub>a</sub> the min:	61
D <sub>a</sub> the max:	78

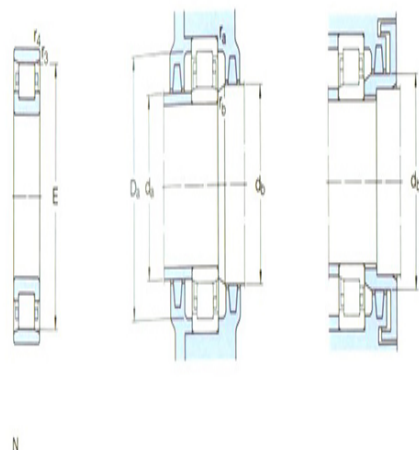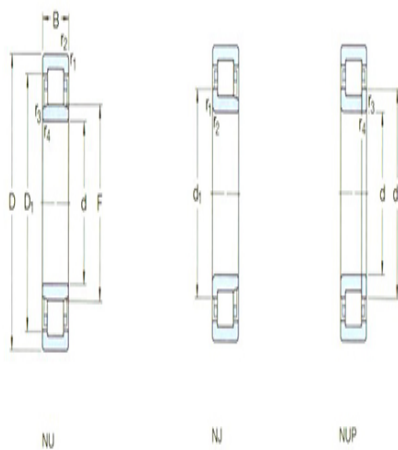



角鋼

$r_a$  the max: 1

$r_b$  the max: 1

Calculation coefficient

kr: 0.15

Corner circle

model: -

quality: -

Size B1: -

Size B2: -