



**Model: N209ECP**

Basic size of  
 mm

d:	45
D:	85
B:	19

The basic rated load is  
 kN

trends C:	69.5
static state Co:	64
Fatigue load limit Pu:	8.15

Rated rotation speed is  
 r/min

Refer to the speed:	9000
limit speed:	9500
Specification standard holder:	0.43

model



Standard holder:	*N209ECP
Other holder 1):	-

Dimensions are  
 mm


d:	45
d <sub>1</sub> ~ :	59
D1 ~ :	-
F,E:	76.5
r <sub>1,2</sub> the min:	1.1
r <sub>3,4</sub> the min:	1.1
s <sup>1)</sup> :	1.2

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	52
d <sub>a</sub> the max:	74
d <sub>b</sub> ,D <sub>a</sub> the min:	78
D <sub>a</sub> the max:	78

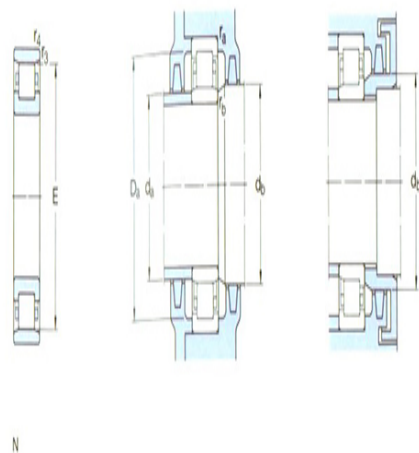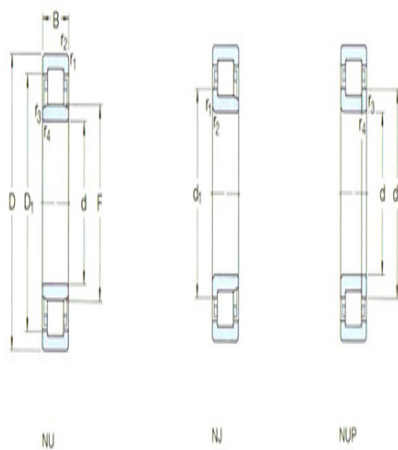

N

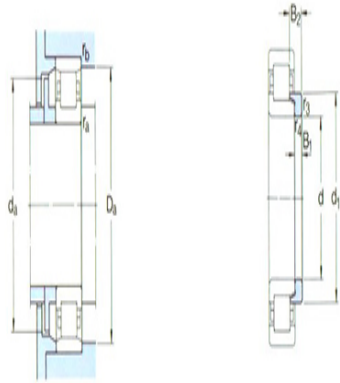

角鋼

$r_a$ the max:	1
$r_b$ the max:	1

Calculation coefficient

kr:	0.15
-----	------

Corner circle

model:	-
quality:	-
Size B1:	-
Size B2:	-