

Model: NU409

Basic size of
mm

d:	45
D:	120
B:	29

The basic rated load is
kN

trends C:	106
static state Co:	102
Fatigue load limit Pu:	13.4

Rated rotation speed is
r/min

Refer to the speed:	6700
limit speed:	7500
Specification standard holder:	1.78

model


Standard holder:	NU409
Other holder 1):	-

Dimensions are
mm

d:	45
$d_1 \sim$:	71.8
$D_1 \sim$:	92.2
F,E:	64.5
$r_{1,2}$ the min:	2
$r_{3,4}$ the min:	2
s^1):	2.5

Shoulder gear and chamfer size
mm


d_a the min:	58
d_a the max:	62
d_b, D_a the min:	67
D_a the max:	107

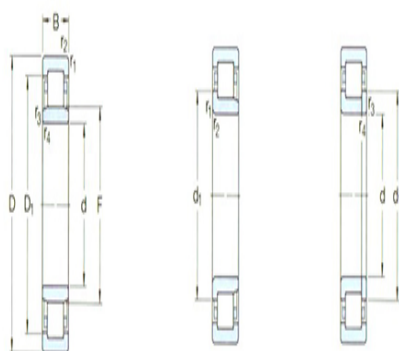


NU

N

NUP

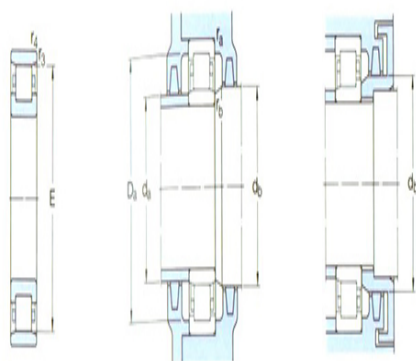

N

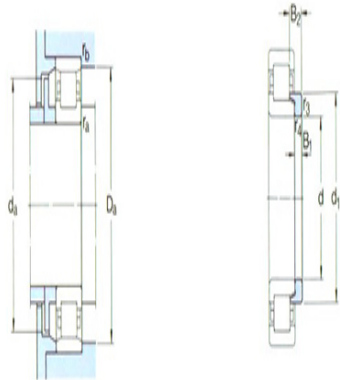

角鋼

r_a the max: 2

r_b the max: 2

Calculation coefficient

kr: 0.15

Corner circle

model: HJ409

quality: 0.18

Size B1: 8

Size B2: 13.5